JETTA

A Professional Notebook PC Supplier Since 1991

Jetta International, Inc.

For over 14 years Jetta has proven to be one of the best notebook PC providers. Established in 1991, Jetta International Inc has been a professional notebook PC supplier in the East Coast of the United States for over 14 years. During this time, we have grown to be one of the largest Notebook PC suppliers on the East Coast. With our high standards, aggressive pricing and superior customer service, we have proven to be one of the best notebook PC suppliers in the United States. Due to our reliable and consistent service, support and product quality, Jetta has been honored as a Microsoft Gold Certified Partner and Intel Mobile Premier Provider.

intel inside
centrino
MOBILE TECHNOLOGY

Microsoft
GOLD CERTIFIED
Partner

intel.
premier
PROVIDER
2004

About Jetta

History and Reputation

For over 14 years Jetta has proven to be one of the best notebook PC providers. Established in 1991, Jetta International Inc has been a professional notebook PC supplier in the East Coast of the United States for over 14 years. During this time, we have grown to be one of the largest Notebook PC suppliers on the East Coast. With our high standards, aggressive pricing and superior customer service, we have proven to be one of the best notebook PC suppliers in the United States. Due to our reliable and consistent service, support and product quality, Jetta has been honored as a Microsoft Gold Certified Partner and Intel Mobile Premier Provider.

Highest Product Quality

We start our quality assurance by carefully screening and selecting only the best original equipment manufacturers. We do this to maintain the quality requirements of being a Microsoft Gold Certified Partner and Intel Mobile Premier Provider, but more importantly to maintain the quality expectations our customers. Jetta's notebook PC products are of the best quality because only the finest computer manufacturers produce them. These manufacturers also produce notebooks for the top brand-name manufacturers such as IBM, Apple, Dell, HP, Toshiba, etc. Jetta is the channel outlet for manufacturers who produce the brand name notebooks you recognize. We excel at providing mid and high level notebook with the best quality and lowest prices. Why pay more when you can get the same high-quality, fully loaded portable computer with much faster service, for less?

Superior Service and Support

Jetta provides fast and consistent product service and support. No one is happy when a notebook needs to come in for service. It is a nuisance, especially if you purchased a computer from a retailer who is not able to perform the repair service fast enough. We at Jetta maintain a large inventory of replacement parts at our home facility. We are fully equipped to fix all of our products. Within warranty, the average service turnaround time is just 3 business days from the day we receive the unit - 10 whole days faster than the industry standard! Thanks to our well-prepared service facility, we are confident enough to put our RMA status online. Jetbook owners and resellers are able to track the status of their repairs anytime, from anywhere. At Jetta, we do not just guarantee the service - we prove it.

The Best Value

Jetta's price strategy is quite simple - we want to provide you the highest quality products, backed by the quickest service and support, at the most aggressive prices possible. Most computer users only compare the buying price of their machines, ignoring the other components of a good purchase, such as memory, hard drive, etc. If you are a business professional, you know that productivity is lost without your notebook computer handy. Compare us to other vendors; our service department is able to repair your computer in an average of 72 hours. This dramatically reduces your downtime and lost revenue. Jetbook brand notebooks feature the latest technology, at the minimum cost, with the fastest service creating the best value.

JETBOOK 2500

"JETTA, EVERYTHING YOU WOULD EXPECT FROM DELL BUT FOR LESS."

Intel ® Centrino ™ Technology
True Performer
15.4" Wide Screen 1680x1050

ATI 9700 Pro 256MB VGA

The Jetbook 2500 is a true performer. Featuring Intel Centrino ™ Mobile Technology and ATI Mobility Radeon 9700 pro 256Mb VGA RAM, there is no wonder why the 2500 can break performance barriers so easily.

In addition to these two leading technologies, the Jetbook 2500 also comes equipped with a 15.4" WSXGA LCD screen displaying 1680x1050 ultra high resolution making it perfect for 3D gaming, CAD modeling, and business applications.

Performance did not override mobility in the Jetbook 2500. Within the slim 6.6lb thin laptop we provided not only wireless connectivity but also strong battery life.

Featuring Intel ® Centrino ™ Technology
- Intel ® Pentium-M Processor
- ATI 9700 Pro 256MB VGA
- 15.4" WXGA TFT Display
- 1"-1.3" thin and 6.6 lb
- 4-in-1 Card Reader (SD/MMC)

JETBOOK 2500 SPECIFICATIONS

Processor
Intel Pentium M, Dothan CPU from 1.7 GHz to 2.0 GHz 400 MHz FSB

Core Logic
Intel 855PM + Intel (ICH4-M)FW82801DBM , Support DDR 333.

Video
ATI Mobility Radeon 9700 Pro 256MB Video Ram

Memory
DDR SDRAM 266 / 333, PC2700 / PC2100 compatible 128 / 256 / 512, 2.5-Volt 64-bit bus Two 200-pin DIMM sockets, Max 1 GB

Audio
Intel (ICH4M) integrated audio controller VT1612A DirectSound 3D, EAX 1.0 & 2.0 compatible A3D, I3DL2 compatible AC97 V2.3 compatible 2 Stereo Speakers with 1 Subwoofer

PCMCIA
OZ711MC1 (PC Card), OZ711MC1 (Card Reader) Single Slot TYPE II, Hot insertion and removal supported

IDE Controller
2.5-inch format hard disk drive,

HDD
Toshiba/ Fujitsu/ Hitachi/Seagate, 40/60/80GB 2.5" 4200/5400/7200 RPM

Keyboard
86-key QWERTY keyboard with embedded numeric keypad and Windows keys, 19.05mm Pitch

Memory Card
4 in 1 card reader supports Multimedia Card (MMC), Secure Digital Card (SD), Memory Stick (MS), and MS Pro Card

Optical Device
CD-RW/DVD Combo * Dual DVD_RW (Optional)

Point Device
SYNAPTICS * PS/2 Touch Pad with 2 buttons * Supports scroll Up/Down function by driver installed

S/W MODEM
Intel (ICH4M) integrated Modem Controller with MDC card, AC97 V2.2 Modem support V.92 / V.90 / K56flex for download data speed up to 56Kbps. V.34, V.17, V.29 protocol supported

Wireless
Intel 802.11 b/g * Compliant with 802.11g and 802.11b (2.4GHz)

LAN Controller
Realtek RTL8100CL Ethernet function for 10/100Base-TX network standards

IEEE 1394
TI TSB43AB22A IEEE1394 OHCI Host Controller and Up to 400 Mbps

Display
15.4 LCD Display WSGA(1680 X 1050)

I/O Port
- One Microphone-in jack
- One Headphone / SPDIF jack
- One Line-in jack
- One Firewire (IEEE1394) host connector
- Three USB2.0-compliant connectors +
- One standard network Ethernet connector (RJ-45)
- One modem / phone connector (RJ11)
- One S-video (TV-out) output connector
- One DC-in connector
- One 15-pin VGA connector
- One 4-in-1 Card Reader slot
- One PC Card Slot (type II)

Primary Battery
Li-ion 6-Cell pack, 10.8V x 4400 mAh

AC-DC Adapter
Autosensing AC-in 100~240V, DC-out 20V, 90W

Operation System
Windows 2000 and Windows XP

System BIOS
- AMI PnP BIOS
- Power On Self Test DRAM auto-detection,
- auto-sizing L2 Cache
- auto-detection Hard disk type
- auto-detection APM 1.2 (Advanced Power Management) & ACPI 2.0 (Advanced Configuration Power Interface)
- Two Level Password Protections 32bit access,
- Ultra DMA, PIO5 Mode support Multi-boot capability

Dimension:
Width: 14.09" (358mm)
Depth: 10.71" (272mm)
Height: 0.9" ~ 1.3" (25 ~ 33mm sloped)
Weight: 6.6 lbs, (3 kg)

JETBOOK[TM] C223

"JETTA, EVERYTHING YOU WOULD EXPECT FROM DELL BUT FOR LESS."

Intel ® Centrino ™ Technology

Light Weight

4.1 LB, 12.1" WXGA

The ultra compact form factor allows transportation virtually anywhere while the Intel ® Centrino ™ technology compliant platform lets you roam wirelessly longer. The C223 provides the ultimate combination of form and function.

The convergence of Instant-On technology, let you play music or DVDs instantly without starting Windows on the display.

MOBILE TECHNOLOGY

Featuring Intel ® Centrino ™ Technology
- Intel ® Pentium-M Processor
- Intel 2200 802.11B+G Wireless LAN
- 12.1" WXGA TFT Display
- 1.2" thin and 4.1 lb
- 4-in-1 Card Reader (SD/MMC)

Jetta International, Inc.   800-445-3882   http://www.jetta.com

JETBOOK C223 SPECIFICATIONS

Processor
Intel Pentium M, Dothan CPU from 1.7 GHz to 2.0 GHz 400 MHz FSB

Core Logic
Intel 855GME + Intel (ICH4-M)FW82801DBM Support DDR 333 memory technology,

VGA Graphic
Intel ® Extreme Graphics 2 technology, integrated 64MB DDR VGA graphic

Memory
DDR SDRAM DDR 333, SO DIMM 200-pin x 2 Up to 1GB

Audio
Codec VT1612A, Microphone Input, Headphone Output, SPDIF Output, Build-in Microphone

PCMCIA
TI PCI1410, Card bus, Single-slot ACPI Card Bus (Type II)

IDE Controller
Integrated in Core Logic, Support Ultra ATA 100

HDD
Toshiba/ Fujitsu/ Hitachi/Seagate 2.5" 40/60/80GB at 4200/5400/7200 RPM

Keyboard
Sumrex , 86 Keys, Windows Key, Number Key support

Memory Card
4 in 1 Genesis GL817E, Support SD card, MS card and, MMC card and MS-pro, USB 2.0 compliant, Support boot function

Optical Device
CD-RW/DVD Combo, Dual DVD_RW (Optional)

Point Device
SYNAPTICS, PS/2 Touch Pad with 2 buttons, Supports scroll Up/Down function by driver installed

S/W MODEM
MDC Board, Standard AC97 MDC interface with Scatter, Gather and Burst capability, Wake on Ring on ACPI mode through AC97 link, Supports ITU v.92/v.90

Wireless
Intel PRO/ Wireless 2200 MSI MS-6833 (Optional), IEEE 802.11 b/g, Compliant with 802.11g and 802.11b (2.4GHz)

S-Video
CH7011 , Support Lumance, Chroma and Composite signals for TV, 4-pin S-Video connector, Integrated NTSC and PAL encoder

LAN Controller
RTL8100CL, Supports 10 and 100 Mb/Sec. Full and half Duplex operation

IEEE 1394
T1 TSB43AB22A, Support IEEE 1394 and 1394a with Open HCI Compliance, PCI V2.2 MAC/BIU supports

Display LCD
16:10 ratio 12.1" WXGA wide screen display(1280 X 800)

I/O Port
1x DC-IN Jack
1 x 15 Pin CRT Port
1 x S-Video Output Port
1 x IEEE 1394 Port
2 x Phone Jacks For Microphone Input / Audio Output
External Microphone Jack 1/8"
External Headphone Jack 1/8" with SPIDF
1 x RJ-45 LAN
1 x RJ-11 MODEM
1 x PCMCIA Card bus socket for PC Card Type II
2 x USB 2.0 Ports
1 x card reader port (4 in 1)
Speaker
1 watt x 8 ohm x 2 + 1.5 watt x 8 ohm x 2 (Speaker) (16:10)
1.5 watt x 8 ohm x 2 (Speaker) (4:3)

Primary Battery
6Cells, 11.1V/4000mAh (3S2P), 3.7V/2000mAh/Cell,

AC-DC Adapter
Li-Shin/Lite-On Hi-Pro (20V/65Watts)

Function Key
Fn + F1 : Enters Suspend Mode.
Fn + F2 : Wireless LAN on or off
Fn + F3 : Turns Battery Warning Beep on or off.
Fn + F4 : Display Mode: LCD-only, CRT-only and LCD&CRT.
Fn + F5 : Turns Speaker Volume up.
Fn + F6 : Turns Speaker Volume down.
Fn + F7 : Increases Display Brightness.
Fn + F8 : Decreases Display Brightness.

Operation System
Windows 2000 and Windows XP

System BIOS
Plug and Play Note BIOS with ACPI 2.0 and APM 1.2

Dimension:
L9"X W11.5" X H1"~1.25"
Weight: 1.9kg, 4.1lb

JETTA

JETBOOK 9450S

"HIGH PERFORMANCE LAPTOP AT AFFORDABLE PRICE"

Special processor design Compatible with
- **Intel Pentium 4**

Module Bay Support
- **Floppy or**
- **5-in-1 Card Reader**

Wireless Capability Support
- **802.11B+G or**
- **802.11A+G**

Optical Bay Support
- **CD-ROM or**
- **DVD-CDRW**

5-in-1 Card Reader or Floppy Drive at Your Choice

Featuring Intel ® Pentium ® 4 Technology
- Intel ® Pentium 4 Processor
- 15.1″ XGA TFT Display support 1024x768 resolution
- All-In-One 3 Spindles, Built-in 5-in-1 card reader or Floppy Drive at your choice

JETBOOK 9450S SPECIFICATION

Weight
- 7.50 lbs, include 15.1" LCD, HDD, 9 cells battery, DVD, Modem
- 7.20 lbs, include 14.1" LCD, HDD, 9 cells battery, DVD, Modem

Chipset
- SiS661FX + SiS963L

CPU
- Intel Pentium 4 or Pentium 4 Mobile
- Prescott, Northwood, Celeron
- 400/533 MHz PSB
- CPU speed: follow Intel road map
- CPU is socket and accessible

Main Memory
- PC2700(DDR 333) SDRAM memory interface design
- 0MB DDR RAM on board
- Two DDR SODIMM (200-pin/2.5V/1.25V) connectors
- Maximum memory up to 2 GB (with two SODIMMs)

HDD
- 9.5mm height, 2.5" HDD, Configurable.
- PCI Bus Master Enhanced IDE
- Support Ultra DMA-100
- HDD module is customer replaceable with screws.

Media Module
- FDD Module 1.44MB drive (3-mode), 12.7mm square type
- Card reader Module.: (i). SD/MMC slot, MS slot, SM slot, CF slot. (ii) Phison PS1006C, USB interface.

ODD
- 12.7mm, 24X CD-ROM Drive
- 12.7mm, 24X CD-RW/ DVD Combo drive (CD-ROM Read/24X, CD-R/RW Write/24X, DVD: Read/8X)

Display
- 1024x768 XGA TFT color LCD (SPWG-B), 15.0"
- 1024x768 XGA TFT color LCD (SPWG-B), 14.1"

PCMCIA
- ENE CB1410
- PC card 95 supported with one type II
- PCI card bus
- No ZV support

Keyboard
- ENE KB910 K/B controller
- 85/86 keys support with 101/102 key emulation
- Support Windows key, Application key
- 19 mm pitch, 3.0 mm travel length
- Full size keyboard with localization, key layouts for US, Europe and Japan required

Pointing device
- Touch pad

Audio
- Realtek ALC250 AC97 Codec.
- Two speakers

Battery
- 9-cell of 18650 Li-Ion battery pack, 11.1V ,6300 mAH , 69.63WHr.
- 2.0 ~2.5 hrs operation time with ZD Battery Mark 2001 test
- 3.0 hrs charging time when system is OFF mode or Standby
- CPU throttling protection may be activated in battery only when system loading is over 69.63W

AC Adapter
- Universal AC adapter. 90-264V AC, 47-63HZ
- 90W with 19V DV output.
- 2-Pin
- phy jack (2.5mm)
- CPU throttling protection may be activated in AC-In when system loading is over 90W

I/O ports
- VGA port, 15 pins
- Microphone-in/Line-in jack.
- Headphone-out/Line-out jack
- USB 2.0 port x 3
- DC in jack
- RJ-11 jack for Modem
- RJ-45 jack for LAN
- Parallel port
- SD/MMC slot, MS slot, SM slot, CF slot. (if Card Reader is installed)

Environment
- Temperature: Operating - 0 to 35°C
- Storage: -20 to 65°C
- Humidity: 10 to 90% without condensation at 0 ~45°C; Non-OP: 90% RH at 65°C

JETTA'

JETBOOK Q200B

"HIGH PERFORMANCE LAPTOP AT AFFORDABLE PRICE"

The only all-in-one Centrino ™ Notebook

(floppy built-in)

intel inside
centrino
MOBILE TECHNOLOGY

The Most Stable and Reliable Jetbook - Pursuing Zero Hardware Defect

Featuring Intel ® Centrino ® Technology
- Intel ® Pentium ® M Processors up to 1.7GHz
- Intel 855GM (Montara-GM) ICH4-M Shared 32/64MB
- 15.1″ XGA TFT Display support 1024x768 resolution
- All-In-One 3 Spindle (1.2″ thin)
- Built-in Floppy Drive and Built-in COM Port

JETBOOK Q200B SPECIFICATION

Processor & platform
Intel® CentrinoTM Mobile Technology
Intel Pentium M Processor 1.3GHz to 2.0GHz
Intel PRO Wireless Network Connection 802.11B+G
Intel 855GM Chipset
uFC-PGA Packagen 400MHz FSB with 1MB L2 Cache

BIOS
512K BB Flash ROM

Chipset
Intel 855GM (Montara-GM) + ICH4-M

Main Memory
Zero on board and two SO-DIMM memory sockets
128MB to maximum 2GB 266MHz DDR SDRAM

LCD Display
15.1" TFT-LCD SXGA+, 1024x768, 16.7M colors

Graphics
Intel 855GM Embedded
Shared memory options of 8/16/32MB

Hard Disk Drive
One 2.5" 9.5mm IDE HDD 5400rpm with Ultra DMA/100/133
support, Supported capacities of 20/40/60/80 GB

Floppy Disk Drive
Fixed type FDD of 3.5", 1.44MB (Standard)
Option of 4-in-1 SMR by replacing the FDD

Optical Disk Drive
24/10/8/24X Combo CD-RW+DVD (Standard)

Modem
56K S/W Modem on board,V.90/92 support

PC Cards Slot
PCMCIA 2.1 compliance, supports two Type II or one Type III

LAN & WLAN
Ethernet 10/100BaseT on board
Intel Centrino® WLAN: 802.11b or 802.11a/b Mini-PCI Module with
dual band antenna (Optional)

Interface I/O Port
1 IEEE 1394
2 Audio jacks: Microphone-in/Speaker-out
1 Infrared IrDA port support FIR
1 VGA port/Mini D-sub 15-pin for external monitor
2 USB ports (v2.0)
1 Serial port
1 Printer port
1 RJ11 connector for Modem
1 RJ45 connector for Ethernet
1 PS2 port
1 DC-in

Audio
Built-in AC'97 stereo sound, with 3D sound effects
Built-in two stereo speakers

Mini-PCI
One Mini-PCI Slot, Type 3B, CTO ready

System Status LED
Power on/Suspend, Battery Charging, HDD Access, Caps Lock,
Scroll lock and Number Lock

Keyboard
86/87/88-key with Windows function keys
19mm full size with palm rest

Hot Keys on Keyboard
4 Instant keys: Email, Internet, AP1, AP2
Function Keysu   Fn+F1 Suspend switch
Fn+F2 Wireless Enable/Disable
Fn+F3 LCD/CRT/LCD+CRT Switch
Fn+F4 Brightness down
Fn+F5 Brightness upu   Fn+F6 Mute
Fn+F7 Volume Down
Fn+F8 Volume Up
Fn+F9 Media Play/Pause
Fn+F10 Media Stop
Fn+F11 Media Play Backward
Fn+F12 Media Play Forward

Power Management
Full feature ACPI power management, Stand-by, Suspend to Disk,
Suspend to RAM
ACPI 1.0b supported with Intel SpeedStep

Battery Pack & Life
Li-Ion 8 cells, 4000mAh battery pack
Charging time: 3 hrs (power off) / 4 hrs (power on)
Battery life up to 5 hrs (in Windows XP)

AC adapter
Output: 19V DC, 3.15A, 60W
Input: 100~240V AC, 50/60Hz Universal

Pointing Device
Built-in touch pad with scroll function.
2 click buttons and 1 scroll button set (up and down)

Dimensions :
12.5(W)x10.2(D)x1.2(H) inch

Weight:
5.5lb (with 15.1" LCD, CD-ROM, Battery)

Security
Kensington lock hole
System password

OS & S/W
Windows XP compliance
Utility & Driver CD

JETTA'

JETBOOK 2400A

"AMD ATHLON 64 BIT MOBILE PROCESSORS"

AMD 64 Mobile Athlon

**AMD64 and Enhanced
Virus Protection**

AMD Mobile Athlon 64 Bit PRocessors

- Mobile AMD Athlon 64 processors are compatible with all available wireless solutions including the most advanced 802.11g solutions. Now available in model 3400+

- The low-power Mobile AMD Athlon 64 processor allows you to fit a high performance processor into a thin and light design, that when coupled with integrated wireless technology, delivers connectivity on the go, and powerful performance for today's demanding mobile users.

*ATI Radeon 9700 DDR
128MB VGA Memory*

Featuring AMD Mobile Athlon 64 bit notebook processors

- The first 64-bit PC processor, in a class by itself, designed specifically for notebook computing

- Only AMD64 technology runs today's 32-bit and tomorrow's 64-bit software

- HyperTransport™ technology enabling increased bandwidth and reduced I/O bottlenecks for increased system performance and better multitasking

- Enjoy extended battery life with AMD PowerNow!™ technology

- Fully compatible with all available wireless solutions including 802.11a, b and g

- Enhanced Virus Protection for Microsoft Windows XP SP2 allows you to surf the Internet with confidence

JETBOOK 2400A SPECIFICATION

CPU

AMD Mobile Athlon 64 bit Processors up to 3400+, 1 Megabyte L2 cache
HyperTransport™ Technology for Industry Leading Performance
AMD PowerNow!™ Technology for Extended System Battery Life
Enhanced Virus Protection for Windows XP Service Pack 2
3DNow!™ for 3D Multimedia Content Ready for your 64-bit future
Protect your investment with a technically superior PC processor

MEMORY

DDR SDRAM, 0 Mbytes On Board
200 PINS DDR SO-DIMM socket*2
2.5V Interface for DDR SDRAM support PC2700/PC2100

Core Logic

SiS 755
Hyper Transport™ Technology with 8/16 links support
Hyper Transport™ Technology up to 3.2GB/s bandwidth
AGP V3.0 Compliant, Support AGP 8X/4X Interface
High throughout MuTIOL Connect interfaced to SIS963L MuTIOL Media
I/O, Bi-directional 16 bit data bus, 1 GB/s Performance in 133MHz x 4
mode

SiS SB 963L
Integrated Multi-threaded I/O link ensures concurrency of upstream/down
stream data transfer with 1.2GB/S bandwidth.
Multiple DMA Bus Architecture
Concurrent Servicing of all DMA Devices: Dual IDE Controllers
Three Ultra DMA 33/66/100/133
Universal Serial Bus Host Controller
Integrated Fast Ethernet MAC Controller, 2,4 Channels of AC97 speaker
outputs and V.92 HSP-Modem

VGA

ATI M11P (9700) highly optimized 128-bit engine.
Maximum performance on AGP 8X platforms.
Support of DirectX9 features.
Enhanced MPEG-2 hardware decode
128M Double data rate, up to 350MHz.

TV Encoder(TV Output)

Integrated ATi M11-P

PCMCIA

OZ711M1, Support Card Bus Type II * 1

Memory Card

OZ711M1, MMC/SD/MS card reader

Audio Codec

ALC650 Digital S/PDIF output/input
18-bit stereo full-duplex CODEC
High-performance CODEC with high S/N ratlo(>90 Db)
4 analog line-level stereo inputs with 5 bit volume con-
trol:LINE_IN,CD,VIDEO,AUX

Speaker

2 speakers (1.5w/8Ω)

Wireless LAN

Optional Wireless LAN module (Mini PCI)

Fast Ethernet

Controller RTL8201BL Supports 10 and 100 Mb/Sec. Full and half Du-
plex

Modem Controller

Integrated in core, IC'97 V2.2 compliant Modem controller, V.90 HSP
modem

Keyboard

Support WIN98 key, 88 keys, 19.05mm pitch

Pointing Device
SYNAPTICS, PS/2 Touch Pad

LCD

15.4" WXGA TFT resolution:1280x1050 pixel

HDD

2.5" / 9.5mm, Ultra DMA33/66/100 support

Optical Device

Removable DVD-CDRW Combo, Removable DVD-RW (Optional)

Battery Pack

Primary Li-Ion Battery 8-Cells

AC-Adapter

Universal 100-240V, 50-60Hz, 120W

I/O Port

1 CRT port
1 S-Video TV out
1 IEEE 1394
1 Microphone-In Jack
1 Audio-Out Jack/SPDIF out
1 Line-In Jack/SPDIF in
1 DC-In Jack
1 FIR
1 RJ-45 Jack
1 RJ-11 Jack
3 USB port (USB2.0)
1 Print port
1 PCMCIA Slot Type-II
1 Memory Card, MMC/SD/MS card reader

Operating System

Support Win 2000 and Win XP

Dimension

15.4" (W) x 10.5"(D) x 1.33"(H)

Weight

3.5kg (7.7lbs.)

JETBOOK 9500S

"JETTA, EVERYTHING YOU WOULD EXPECT FROM DELL BUT FOR LESS."

Intel ® Centrino ™ Technology

Unwire

A café. An airport. A bookstore. A cafeteria. With Intel ® Centrino ™ mobile technology, you can connect wirelessly from an ever-growing number of hotspots around the globe. Now your notebook can be as mobile as you are. Untangle, unburden, un-complicated and unwire your life.

Featuring Intel ® Centrino ™ Technology
- Intel ® Pentium-M Processor
- Intel 2100 802.11B Wireless LAN
- 14.1"/15.1" XGA TFT Display
- 1.2" thin and 5.5 lb
- Card Reader (SD/MMC)

JETBOOK 9500S SPECIFICATION

Processor:
Intel® Centrino™ CPU Intel Centrino Pentium M CPU
uFCPGA Package, FSB 400Mhz

Chipset:
Intel MGM, ICH4-M, Support PC 2100,

Memory:
DDR DRAM 200/266, 0 MB on board, Upgradeable to
1024MB Memory by two sets of SODIMM

Module Bay:
Support 12.7mm CD-ROM device, Option for 12.7mm DVD/
CD-RW Combo, DVD -RW devices

HDD:
9.5mm, 2.5" HDD, 20/30/40/50/60/80GB, PCI Bus Master
Enhanced IDE, Ultra DMA 66/100 support

Display:
14.1" XGA TFT color LCD, 15" XGA TFT color LCD

Video Chip:
VGA is integrated in Intel Montara-GM chip, Simultaneous
display on LCD and CRT, 3D Windows accelerator
Supports 15/16/24bbp True Color on LCD & dual view,
Hardware expansion for high resolution LCD, Support TV-
out feature by extra TV-Encoder
Shared video up to 64MB

Audio:
Realtek ALC202- Built-in two speakers

PCMCIA:
PC Card & Card bus card supported with one type II

Communication:
Modem 56Kbps V.90/V.92 AC-Link modem card (MDC),
LAN 10/100M LAN on board, Wireless Wireless LAN,
802.11a+b (or b) with Mini-PCI interface

Keyboard:
85/US, 86/UK, 90/JP keys with 101/102 key emulation,
Windows key, Application key, 2.5mm travel length

Point Device:
Touch pad with two buttons

I/O Ports:
- 3x USB 2.0
- DDC-2B compliant VGA port, 15 pins
- Microphone-in and headphone-out jacks
- IEEE 1394 port, 4 pins
- RJ-11 Modem
- RJ-45 LAN
- TV- Out
- DC- jack
- SD slot
- Parallel port
- FIR
- Kensington Lock

System Status Indicators:
- Caps, Num, Scroll LEDs
- Power/suspend status (Dual color)
- Battery charging (dual colors)

- IDE activity LED
- Module bay activity LED
- One LED activity for 802.11b (or a+b)- SD status

Controls:
- Power button control by software
- Lid switch control by software
- One button to Enable/Disable Wireless Device

AC-DC Adapter:
Universal AC adapter. 90-264V AC, 47-63HZ 60W with 19V
DC output

User Keys:
- 2 Application keys for user define utilities
- 5 CD-Player buttons (Instant ON Media Player)* Buttons
function defined as Power, Play, Stop, Forward, and
Backward

Battery:
- 8 cells Li-Ion battery pack with 65Wh also, to support 5
hrs operation time (battery mark 4.01, in XGA resolution)
- Approximated charging time 3.5 hr (System on), or 2.5
hr (System off)
- Smart pack, SMbus
- Build up bridge battery to support up to 3 minutes
running time during S3 stage (support main battery warm
swap)

Software:
- Insyde (or Phoenix) BIOS
- 512KB Flash BIOS ROM
- Suspend to RAM, Suspend to Disk
- Various hot-key for system control
- Password protection for system
- ACPI 1.0b compliant

Operating System:
Windows XP and Windows 2000 compatible

Options:
Mini PCI for Wireless LAN (802.11a+b / 802.11b)- MDC
card

Logo:
PC 2001 LOGO, K/B LOGO

Physical dimension:
12.99" x 10.74" x 1.24" (330mm x 273mm x 31.7mm)

Weight:
5.6 lbs with 14.1" LCD + DVD-ROM + Battery

JETTA'

JETBOOK Q500N

**"HIGH PERFORMANCE LAPTOP AT
AFFORDABLE PRICE"**

Q500N features the highest

quality and the most leading

technologies.

intel inside
centrino
MOBILE
TECHNOLOGY

The Most Stable and Reliable Jetbook
Pursuing Zero Hardware Defect

Featuring Intel ® Centrino ® Technology
- Intel ® Pentium ® M Processors up to 2.0GHz
- ATI Radeon M10 64MB DDR VGA Controller
- 15.1" SXGA+ TFT Display support 1400x1050 resolution
- Card Reader — Support SD card, MS card and MMC card
- Gigabyte LAN, Optional Port Replicator w. VGA port and NIC
- Aluminum case increase the durability

JETBOOK Q500N SPECIFICATION

Processor & platform
Intel® CentrinoTM Mobile Technology
Intel Pentium M Processor 715 (1.5GHz) to 755 (2.0GHz)
Intel PRO Wireless Network Connection 802.11b
Intel 855PM Chipsetn
uFC-PGA Package, 400MHz FSB with 1MB L2 Cache
BIOSm, 512K BB Flash ROM

Chipset
Intel 855PM (Odem) + ICH4-M

Main Memory
Zero on board and two SO-DIMM memory socketsn
128MB to maximum 2GB 266/333MHz DDR SDRAM

LCD Display
15" TFT-LCD SXGA+, 1400x1050, 16.7M colors

Graphics
ATI M10 64 MB support AGP4X
64MB DDR333 VGA memory embedded

Hard Disk Drive
One 2.5" 9.5mm IDE HDD with Ultra DMA/100/133 support, Supported capacities of 20/40/60/80 GB

Floppy Disk Drive
External USB type FDD of 3.5", 1.44MB (Optional)

Optical Disk Drive
One Module Bay type 5.25"/9.5mm optical storage device, choices of 24/10/8/24X Combo CD-RW+DVD

Modem
56K S/W MDC Modem,V.90/92 support

PC Cards Slot
PCMCIA 2.1 compliance, supports one Type II

LAN & WLAN
Ethernet 10/100/1000Mbps LAN on board
Intel Centrino® WLAN: 802.11b or 802.11a/b Mini-PCI Module

Interface (I/O Port)
1 IEEE 1394
2 Audio jacks: Microphone-in/Line-in
1 SPDIF Optical out, combo with speaker-out
1 VGA port/Mini D-sub 15-pin for external monitor
4 USB ports (v2.0)
1 Printer port
1 S-Video TV-out port
1 RJ11 connector for Modem
1 RJ45 connector for Ethernet
1 Port Replicator Connectorn 1 DC-in

Audio
Built-in AC'97 stereo sound, with 3D sound effects
Built-in two stereo speakers

Memory Card Reader
4-in-1 Smart Media Reader (Internal USB interface)
Support Memory Stick, SmartMedia Card, MultiMedia Card, and Secure Digital

Mini-PCI
One Mini-PCI Slot, Type 3A, CTO ready

System Status LED
Power on/Suspend, Battery Charging, Wireless LAN, HDD Access, Caps Lock, Scroll lock and Number Lock

Keyboard
86/87/88-key with Windows function keys
19mm full size with palm rest

Hot Keys on Keyboard
3 Instant keys: Email, Internet, AP1

Function Keys
Fn+F1 Suspend switch
Fn+F2 Wireless Enable/Disable
Fn+F3 LCD/CRT/LCD+CRT Switch
Fn+F4 Brightness down
Fn+F5 Brightness up
Fn+F6 Mute
Fn+F7 Volume Down
Fn+F8 Volume Upu Fn+F9 Media Play/Pause
Fn+F10 Media Stop
Fn+F11 Media Play Backward
Fn+F12 Media Play Forward

Power Management
Full feature ACPI power management, Stand-by, Suspend to Disk, Suspend to RAM
ACPI 1.0b supported with Intel SpeedStep

Battery Pack & Life
Li-Ion 8 cells, 4400mAh, 48W battery pack
Charging time: 3 hrs (power off) / 4 hrs (power on)
Battery life up to 5 hrs (in Windows XP)
Bridge Battery: 2 minutes support warm swapping

AC adapter
Output: 19V DC, 3.95A, 75W
Input: 100~240V AC, 50/60Hz Universal

Pointing Device
Built-in touch pad with 4-way scroll function.
2 click buttons and 1 scroll button set (up and down)

Dimensions :
13.1" (W)x11" (D)x1.17"(H) inch

Weight:
5.9 lb (with 15" TFT LCD, Combo)

Security
Kensington lock hole
System password

OS & S/W
Windows XP/2000 compliance
Utility & Driver CD

JETBOOK C235

"JETTA, EVERYTHING YOU WOULD EXPECT FROM DELL BUT FOR LESS."

Notebook
Designed for Road Warriors

Intel ® Centrino ™ Technology

Unwire

Featuring Intel ® Centrino ™ Technology

- Intel ® Pentium-M
- nVidia 64MB VGA
- Intel 2200 802.11B+G Wireless LAN
- 14.1" XGA TFT Display,
- 1" thin and 5.2 lb

It is lighter, thinner and last longer.

Jetta International, Inc.   800-445-3882   http://www.jetta.com

JETBOOK C235 SPECIFICATION

CPU
Intel Pentium M (Banias, 1M L2 Cache) 1.4/1.5/1.6/1.7G
Intel Pentium M (Dorthan, 2M L2 Cache) 1.8/1.9/2.0G
FCPGA CPU

Chip Set
Intel Odem for system controller.
Intel ICH4-M for PCI to LPC Bridge, PCI IDE controller

VGA Controller
nVidia NV34M (GeForce FX5200) for VGA controller.

Power Management Logic.
KB910 for Keyboard Controller, Battery management
Unit, and RTC
ENE CB1410 for Card Bus PCMCIA controller.
ALC250 for AC97 CODEC
SMCLPC47N217 for super I/O controller.
TSB43AB21A for 1394 controller
RTL8101L for LAN controller
W83L518D for Secure Digital

Memory
No on board memory.
On board with two 200-pin +2.5V SO-DIMM connector,
supporting, DDR memories card. Maximum upgradeable
to 1024MB by two 512MB SO-DIMM module.

BIOS
512KB Flash ROM for system BIOS.

Power
6 cells of LI-ION 1900mAH 103450 size, battery Pack
with 42WH capacity
3 hours operation with Battery Mark 4.01.
3 Hrs charging time to 100% capacity on 3800mAH LI-
ION Battery (System off or Suspend)

One 2.5", 9.5mm Hard Disk, Up to 60GB
Bus Master IDE
9.5m/m, 2.5"HDD Support
Support Ultra 100 synchronous DMA

Select Bay devices
5.25" 12.7mm height DVD-R/RW device
5.25" 12.7mm height COMBO device
5.25" 12.7mm height DVD/RW device

Options
256/512MB SO-DIMM DDR modules
Li-ION Battery Pack
MINI PCI Wireless module

Touch Pad with four buttons
Left Button
Right Button
Scroll up Button
Scroll down Button

I/O Ports
One 25 pins Parallel port, EPP/ECP Capability
One 15 pins CRT port, Support DDC 2B
One 7 pins TV out port
One MIC In port
One headphone-out Port
One 2pins AC Adapter Jack
One type II PCMCIA Card Bus slots
Two 4 pins USB ports
One RJ11/RJ45 Port
FIR
Secure Digital slot(Option)

PCMCIA Card Organization
One type II card sockets
1.8" 10.5mm removable ATA Device
Card bus card or PC Care with hot insertion and removal
ACPI 1.1 Compliant.
Support 5V/3.3V PC Cards and 3.3V Cardbus cards.
Supports PCMCIA-ATA Specification.

Excellent Power Management Function
Standby mode, Suspend to RAM or Suspend to Disk
mode, by time out or by hot key
HDD Local Stand-By mode by time out
LCD Local Stand-By mode by time out
Low battery alarm by beep
Auto-backlight off when LCD cover closed
Full ACPI 1.0B supported
LCD Auto-DIM mode by time out
User Define Button 1, 2, 3

AC Adapter
Universal AC adapter module. 90-264V AC, 65W

Security
Boot-up password protection
Single level password architecture. (Supervisor)

Memory Card & SO-DIMM Socket
256/512MB +2.5V 200-pins DDR SO-DIMM Memory
module upgradeable.

JETTA

JETBOOK 9520

**"JETTA, EVERYTHING YOU WOULD EXPECT
FROM DELL BUT FOR LESS."**

ATI Mobility Radeon 128MB 9600 VGA

Intel ® Centrino ™ Technology

Unwire

A café. An airport. A bookstore. A cafeteria. With Intel ® Centrino ™ mobile technology, you can connect wirelessly from an ever-growing number of hotspots around the globe. Now your notebook can be as mobile as you are. Untangle, unburden, un-complicated and unwire your life.

POWERED BY ATI RADEON 9600 PRO

Featuring Intel ® Centrino ™ Technology
- Intel ® Pentium-M Processor
- Intel 2100 802.11BWireless LAN
- 15.1" SXGA+ TFT Display, ATI 128MB VGA
- 1.2" thin and 5.5 lb
- Card Reader (SD/MMC)

Jetta International, Inc.   800-445-3882   http://www.jetta.com

JETBOOK 9520 SPECIFICATION

CPU

Intel Pentium M 1.4/1.5/1.6/1.7GHz (1M L2 Cache)
Intel Pentium M 1.8/1.9/2.0 GHz (2M L2 Cache)
FCPGA CPU

Chip Set

Intel Odem-B (855PM) for system controller
Intel ICH4-M for PCI to LPC Bridge, PCI IDE controller

VGA Chip

ATI Mobility Radeon (M11) 128MB DDR-266

Power Management Logic.

ENE910 for Keyboard Controller, Battery management Unit, and RTC
ENE CB1410 for Card Bus PCMCIA controller.
M10P/M11P
ACL250 for AC97 CODEC
SMCLPC47N217 for super I/O controller.
VT6301S for 1394 controller
RTL8100BL for LAN controller
W83L518D for Secure Digital

Memory

No on board memory
On board with two 200-pin +2.5V SO-DIMM connector, supporting, DDR memories card
Maximum upgradeable to 1024MB by two 512MB SO-DIMM module
1 MB (Banias) L2 Cache on CPU
2 MB (Dothan) L2 Cache on CPU

BIOS

512KB Flash ROM for system BIOS.
Suspend to RAM/Disk
Password protection (System)
Windows 98 ready with PnP
Various hot key for system control
Refreshable, Complete ACPI 1.0B Function

Power

8 cells of LI-ION 2150mAH 4300 size, battery
Pack with 63WH capacity
4.5 hours operation with Baattery Mark 4.01

HDD

One 2.5", 9.5mm Hard Disk, Up to 80GB
Bus Master IDE
9.5m/m, 2.5"HDD Support
Support Ultra 100 synchronous DMA

OD

Select Bay devices
5.25" 12.7mm height CD-ROM device
5.25" 12.7mm height Combo device
5.25" 12.7mm height DVD_RW

I/O Ports

One 25 pins Parallel port, EPP/ECP Capability
One 15 pins CRT port, Support DDC 2B
One 7 pins TV out port
One MIC In port
One headphone-out Port
One 2pins AC Adapter Jack
One type II PCMCIA Card Bus slots
Three 4 pins USB ports
One RJ11/RJ45 Port
FIR
Secure Digital slot

PCMCIA Card Organization

One type II card sockets
1.8" 10.5mm removable ATA Device
Card bus card or PC Care with hot insertion and removal
ACPI 1.1 Compliant.
Support 5V/3.3V PC Cards and 3.3V Card bus cards.
Supports PCMCIA-ATA Specification.

AC Adapter

Universal AC adapter module. 90-264Vav,47~63Hz 65W

Security

Boot-up password protection
Single level password architecture. (Supervisor)

JETTA'

JETBOOK 2400P

"HIGH PERFORMANCE LAPTOP AT AFFORDABLE PRICE"

Support Intel Hyper Threading Technology Support

Hyper-Threading Technology offers many benefits to e-Business and the enterprise such as:

- Enables more user support improving business productivity
- Provides faster response times for Internet and e-Business applications enhancing customer experience
- Increases number of transactions that can be processed
- Allows compatibility with existing IA-32 applications and operating systems
- Handles larger workloads
- Offers headroom for future business growth and new solution capabilities

ATI Radeon 9700 Pro DDR 128MB VGA

intel inside
pentium 4

Featuring Intel ® Pentium ® 4
- Support Intel Hyper Threading Technology
- Intel ® Pentium ® 4 Prescott Processors up to 3.2GHz
- Support both 800 Front Side Bus
- ATI Radeon 9700 Pro DDR 128MB VGA
- Idea for Gaming purpose
- 15.4″ WSXGA TFT Display support 1280x1050 resolution
- Card Reader — Support SD card, MS card and MMC card

JETBOOK 2400P SPECIFICATION

CPU

Intel P4 Prescott processors up to 3.2GHz (FSB 800MHz)

MEMORY

DDR SDRAM, 0 Mbytes On Board
200 PINS DDR SO-DIMM socket*2
2.5V Interface for DDR SDRAM support PC2700/PC2100

Core Logic

SiS 648FX
Supports 400/533/800MHz FSB Processors
Supports DDR333/DDR266 SDRAM up to PC2700
Supports AGP 8X/4X

VGA

ATI M10PA (9600Pro) highly optimized 128-bit engine.
Maximum performance on AGP 8X platforms.
Support of DirectX9 features.
Enhanced MPEG-2 hardware decode
128M Double data rate, up to 350MHz.

TV Encoder(TV Output)

Integrated ATi M10-P

PCMCIA

OZ711M1, Support Card Bus Type II * 1

Memory Card

OZ711M1, MMC/SD/MS card reader

Audio Codec

ALC650 Digital S/PDIF output/input
18-bit stereo full-duplex CODEC
High-performance CODEC with high S/N ratlo(>90 Db)
4 analog line-level stereo inputs with 5 bit volume con-
      trol:LINE_IN,CD,VIDEO,AUX

Speaker

2 speakers (1.5w/8Ω)

Wireless LAN

Optional Wireless LAN module (Mini PCI)

Fast Ethernet

Controller RTL8201BL Supports 10 and 100 Mb/Sec. Full and half Du-
      plex

Modem Controller

Integrated in core, IC'97 V2.2 compliant Modem controller, V.90 HSP
      modem

Keyboard

Support WIN98 key, 88 keys, 19.05mm pitch**Pointing Device**

SYNAPTICS, PS/2 Touch Pad

LCD

15.4" WXGA TFT resolution:1280x800 pixel

HDD

2.5" / 9.5mm, Ultra DMA33/66/100 support

Optical Device

Removable DVD-CDRW Combo
Removable DVD-RW (Optional)

Battery Pack

Primary Li-Ion Battery 8-Cells

AC-Adapter

Universal 100-240V, 50-60Hz, 120W

I/O Port

1 CRT port
1 S-Video TV out
1 IEEE 1394
1 Microphone-In Jack
1 Audio-Out Jack/SPDIF out
1 Line-In Jack/SPDIF in
1 DC-In Jack
1 FIR
1 RJ-45 Jack
1 RJ-11 Jack
3 USB port (USB2.0)
1 Print port
1 PCMCIA Slot Type-II
1 Memory Card, MMC/SD/MS card reader

Operating System

Support Win 2000 and Win XP

Dimension

15.4" (W) x 10.5"(D) x 1.33"(H)

Weight

3.5kg (7.7lbs.)

JETTA JETBOOK CATALOG

Click sub link for desire destination

JETBOOK 9600

"JETTA, EVERYTHING YOU WOULD EXPECT FROM DELL BUT FOR LESS."

For more information, please visit HTTP://WWW.JETTA.COM

Intel ® Centrino ™ Technology

Unwire

Featuring Intel ® New Centrino ™ 533MHz Technology
- Intel ® Pentium-M Processor 533MHz Front Side Bus
- Intel 802.11 Wireless LAN
- 15.4″ WXGA TFT Display
- 1.25″ thin and 6.36 lb
- 3-in-1 Card Reader (SD/MMC/MS)

JETBOOK 9600 Specifications

CPU
  - Dothan 533/400FSB Up to 2.13GHz

Chipset
  - Alviso GM for Dothan platform (Alviso-PM circuit is reserved)
  - 533Mhz FSB supported

Memory
  - DDR-I 333 with 256MB/512MB/1GB module
  - 0 MB on board
  - Upgradeable to 2GB Memory by two sets of 1GB SODIMM
  - One channel design
  - Easy install from bottom side

ODD
  - Standard 12.7mm, 24X CD-RW/ DVD Combo drive (CD-RW: Read/24X, Write/24X, Re-write/24X; DVD: Read/8X)
  - **Optional** 12.7mm, DVD Dual drive (DVD-R/RW Write 1X, DVD+R/RW Write 2X, CD-R Write 16X, CD-RW Write 8X)

HDD
  - 9.5mm, 2.5" HDD support with 40/60/80GB (4200/5400/7200rpm)
  - PCI Bus Master Enhanced IDE/Ultra DMA 33 support

Display
  - Standard 15.4" WXGA(1280 x 800)

Audio
  - REALTEK ALC250 AC97 Codec
  - Microphone-in and headphone-out
  - Support jack sense function
  - Keyboard control
  - Capable of playing CD while LCD panel is closed (BTO)

Video Chip
  - UMA

PCMCIA
  - ENE 712 (included Card bus + Flashcard Reader controller)
  - PC Card 95 supported with one type-II (No type-III support) Card sockets
  - No ZV-Port support
  - Power switch ENE CP2211

Communication
  - Modem: V.92/56K bps (US/Canada/UK/Germany/ French) ,V90/56K (For other countries) specification compliant and 14.4K bps Send/Receive Fax with MDC solution
  - LAN: board 10/100M bps (Realtek 8100CL single chip),
  - Wireless LAN 802.11b/g Mini-PCI interface.
  - Wireless Lan 802.11a/g (Optional)
  - Easy service from K/B opening for WLAN

Keyboard
  - ENE 910 K/B controller
  - US 87 Key; 12 function keys; 4 cursor keys
  - Windows Keys; Application Key
  - 19.05mm pitch, 2.5mm stroke, H=5.7mm

Pointing Device
  - Touch Pad with two buttons & scroll up/down function

I/O ports
  - USB 2.0 x 3 ports
  - One VGA port, 15 pins
  - Microphone-in
  - Headphone-out jack x 1
  - DC-in jack
  - RJ-11 jack for 56Kbps V.92 Modem
  - RJ-45 jack x 1
  - Kensington lock
  - TV-Out (S-Video) x1
  - 1394 x 1
  - 3-in-1 card reader for SD-host/MMC/MS
  - External USB FDD
  - **Optional** Internal TV tuner (Cyber link-Power cinema)
  - **Optional** AV-in for TV-tuner platform

Controls
  - Power button / Lid switch controlled by software
  - Wireless Communication Switch for Wireless device

User Keys
  - Switch key for selecting the CD-Playback functions, MP3 function and IOMP (MODE button)
  - Control buttons for CD/MP3/IOMP functions Backward Forward Play / Pause Stop Mode (CD/MP3/IOMP) Volume up and down button
  - Control buttons for Short-Cut key functions Internet Access Button Email button

Speaker
  - Two stereo speakers 2W

AC Adapter
  - Universal AC adapter. 90-264V AC, 47-63HZ
  - 65W with 19V DC output
  - Dimension: (Hipro) 108 mm x 45.5mm x 25.9mm (Lite-On) 106mm x 47mm x 28 mm
  - Weight: (Hipro)TBD g, (Lite-On) TBD g
  - 3 pin type for AC inlet and AC plug

Battery
  - 8 cell LI-ION of 18650 size battery pack w/ 65WH (14.8V x 4400mAh) capacity- Smart Battery Compliant

Operating System
  - Windows XP HOME, Windows XP Pro

Dimension
  - 360mm x 265mm x 32.2mm

Weight
  - 2.87 Kg (6.39lb)
  - 15.4" Panel + ODD (Combo) + Battery Pack (8-cell)

JETBOOK C405

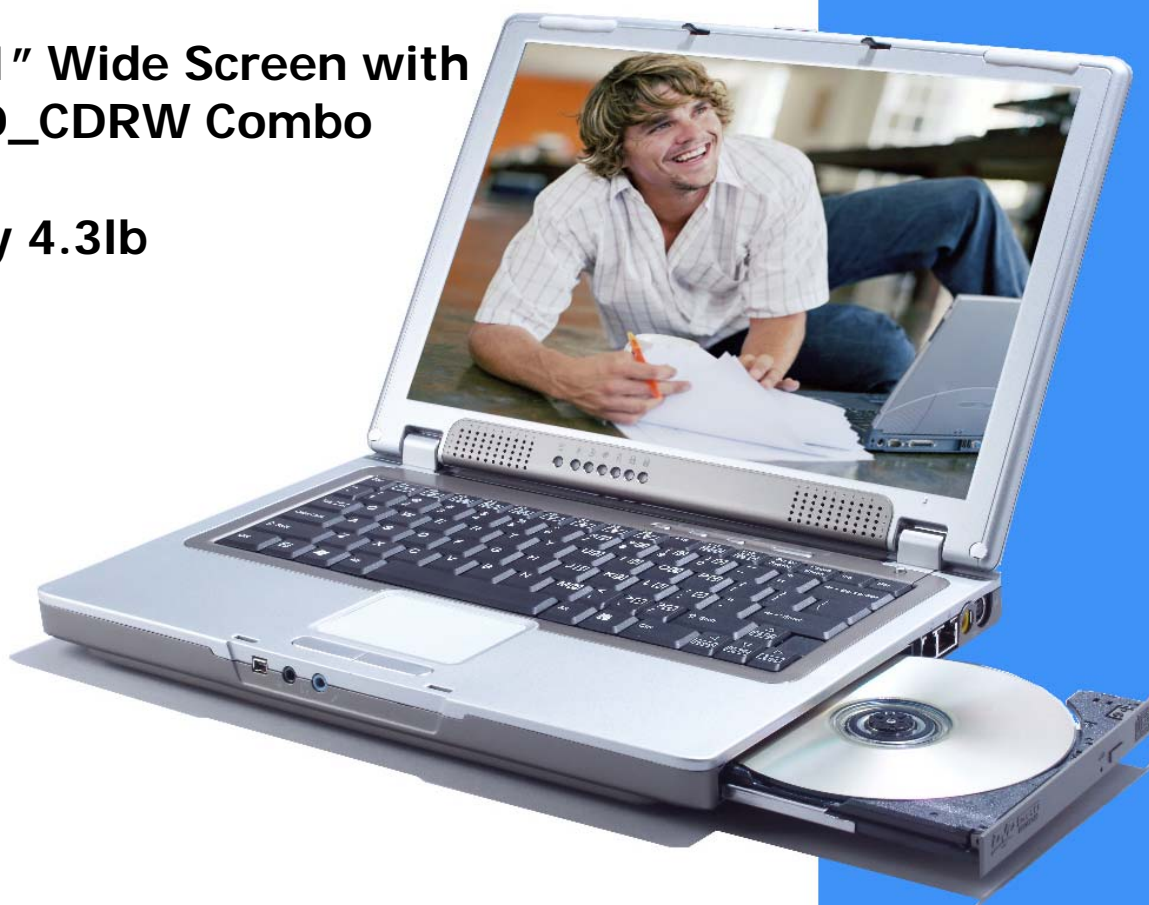**"JETTA, EVERYTHING YOU WOULD EXPECT FROM DELL BUT FOR LESS."**

Intel ® Centrino ™ Technology

Unwire

12.1" Wide Screen with DVD_CDRW Combo

Only 4.3lb

Featuring Intel ® Centrino ™ 400MHz Technology
- Intel ® Pentium-M Processor 400MHz Front Side Bus
- Intel 802.11 Wireless LAN
- 12.1" WXGA TFT Display
- 1.38" thin and 4.3 lb

Jetta International, Inc.   800-445-3882   http://www.jetta.com

JETBOOK C405 Specifications

Processor

Intel Pentium M (Support Banias 1M L2／Dothan 2M L2)
Max. Recommended Frequency: 2.0 GHz (FSB400)

CPU Exchangeable

Alternative Processor   Intel Celeron-M
Maximum Support Freq: 1.4 GHz (FSB400)

Chipset

North Bridge: Intel 855GME
South Bridge: Intel ICH4-M

Weight and Dimension

Width: 296 mm / 11.66 inch
Depth: 205 mm / 8.03 inch
Height: 35 mm / 1.38 inch
Weight: 4.3 lbs/1.95kg

Display

Size: 12.1 inch
Wide Screen (15:10),16M color
Resolution: WXGA: 1280x800
Simultaneous LCD and CRT display
Dual view support

Graphics

System Integrated VGA core
Intel Dynamic Video Memory Technology
System Memory
Available Socket: 2
DIMM Type: SO-DIMM DDR (DDR333/266)
Max. Supported RAM 1024MB
Storage   Card Reader: CF
HDD type: 2.5" EIDE HDD (4200RPM／5400RPM)
Optical Device: DVD ROM／Combo (DVD/CD-RW)／DVD
Super Multi (Optional)

Power

ACPI Compliant
70W AC adapter
4 cell Li-Ion battery pack (Optional)
2.7 hour battery life with ACPI
3.5 hour maximum charge-in-use
1.5 hour rapid charge

Keyboard and Pointing Device

Keyboard 82/83/86 keys

TouchPAD

Easy Launch Keys x 3

Audio System

AC' 97Audio

Direct Sound Compatible
Sound Blaster-Pro Compatible

Wire Communications and Connectivity

10/100 BaseT LAN
Build-in V92 56Kbps software data/fax modem

Wireless Communication

MiniPCI 802.11b or 802.11b/g wireless module with antenna
(Optional)

I/O Ports

1394 port
Card Reader Port (CF)
Cardbus type-II slot x 1
Line-in/Mic-in and Line-out(SPDIF)
Line-Out jack
RJ-11 jack for Modem
RJ-45 jack for 10/100 BaseT LAN
S-Video TV-Out
USB 2.0 Port x 2
VGA port for the second display (CRT, TFT or projector)

Software/Firmware Support

Windows 2000
Windows XP

Security

Kensington Lock

Optional Items

Additional AC adapter
Additional DDR333 256／512MB SO-DIMM
MiniPCI 802.11b/g Module with Antennas
Additional 8 cells Li-Ion battery pack
External USB FDD
Optical DVD Super Multi
Optical DVD-ROM module
Optical Combo (DVD/CD-RW) module

Note

Limited support is offered to Windows 98SE & Windows ME
Strongly recommend Windows 2000 & Windows XP
Actual battery life may vary depending on usage and
configurations

JETBOOK 4200

"JETTA, EVERYTHING YOU WOULD EXPECT FROM DELL BUT FOR LESS."

Intel ® Centrino ™ Technology

Unwire

- **The 3rd Generation Intel ® Centrino ™ Technology**
- **Support DDR2 RAM memory**
- **Support SATA Hard drive**
- **Intel Stable Imaging Platform**
- **High Definition Audio and Video**

Featuring Intel ® New Centrino ™ 533MHz Technology
- Intel ® Pentium-M Processor 533MHz Front Side Bus
- Intel 802.11 Wireless LAN
- Support DDR2 RAM up to 2GB and SATA Hard Drive
- 1.26″ thin and 6.2 lb
- 5-in-1 Card Reader (MS/MS Pro/MMC/SD/XD)

Jetta International, Inc.   800-445-3882   http://www.jetta.com

JETBOOK 4200 Specifications

Processor

Intel Pentium M (Dothan 2M L2/FSB 533) Max.
Recommended Frequency: 750 (1.86 GHZ/533) CPU
Exchangeable Alternative Processor CPU Exchangeable

Chipset

North Bridge: Intel 915GM (Alviso) South Bridge: Intel
ICH6M

Display

Size: 15 inch
Resolution: XGA: 1024x768
Simultaneous LCD and CRT display
Dual view support

Graphics

Intel 915GM embedded
64MB Shared Memory

System Memory

Available Socket: 2
DIMM Type: SO-DIMM DDRII(400/533)
Max. Supported RAM 2048MB

Storage

Card Reader: Multi-Media Reader (SD/MMC/MS/MS Pro/XD)
HDD type: 2.5" SATA HDD (5400RPM)
Optical Device: DVD ROM／Combo (DVD/CD-RW)／DVD Dual

Power

ACPI Compliant
70W/19V AC adapter (Peak Value 70w)
65Wh 8-Cells Cylindrical Li-Ion battery pack
5.4 hour battery life with ACPI
4 hour maximum charge-in-use
1.5 hour rapid charge

Keyboard and Pointing Device

Keyboard 84/85/88 keys- inverted "T" cursor layout
Touchpad with Toggle
Easy Launch Keys x 5 x 0

Audio System

AC' 97 2.2-compliant stereo audio
Audio DJ/Music CD Playback
Sound Blaster-Pro & MS-Sound System compatible

Wire Communications and Connectivity

10/100 BaseT LAN
Build-in V92 56Kbps ITU standard fax/modem in MDC
module

Wireless Communication

Build-in antenna Build-in antenna x 1

Mini PCI 802.11a/b/g wireless module (option)
Mini PCI 802.11a/b/g wireless module (option)

I/O Ports

1394 port
Card Reader port (MS/MS Pro/MMC/SD/XD)
Cardbus type-II slot x 1
Line in / Mic in jack
Line-Out / SPDIF jack
RJ-11 jack for Modem
RJ-45 jack for 10/100 BaseT LAN
S-Video TV-Out
USB 2.0 Port x 3
VGA port for the second display (CRT, TFT or projector)
One Audio DJ Panel
One Speaker / Headphone-out jack (SPDIF)

Slot

Express Card slot Express Card x 1

Software/Firmware Support

Windows 2000
Windows XP

Security

Kensington Lock

Weight and Dimension

Width: 330 mm/ 12.99 inch
Depth: 275 mm / 10.83 inch
Height: 32.1~40.1 mm / 1.26~1.58 inch
Weight: 6.17lbs /2.80 kg