

Remington *laminations* Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 ~ U.S.A.
Tel: 972.336.0012 Fax: 972.352.2975
Toll Free Tel: 877. 317. 1716 Toll Free Fax: 888. 563. 6565
www.remingtonlaminations.com

Worldwide Suppliers
Of
Laminates - Adhesives - Laminating Equipment & Accessories

THE ULTIMATE BOND & PROTECTION
FOR YOUR GRAPHIC OUTPUT

Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated

Effective September 2004
Product Catalog

Catalog Contents

General Information - Terms and Conditions

Product Listing

Section 1. Mounting Adhesives, Pressure-Sensitive, Thermal-Sensitive & Heat Press

Section 2. Pressure-Sensitive Laminates and Vinyl's

Section 3. Thermal-Sensitive Laminates & White Blockers (Backers)

Section 4. Equipment & Accessories

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

- General Information - Terms and Conditions - U.S.A. Orders

To Place an Order:

Use our Toll Free Tel # **877. 317. 1716**

Or

Use our Toll Free Fax # **888. 563. 6565**

Please clearly indicate the assigned **part #, product name, size, quantity and preferred shipping method.** If a purchase order is not issued, your faxed order will be considered your formal purchase order. If requested, a confirmation of your order will be sent to the issuer of the P.O.

Methods of Payment (Terms):

Prior to credit approval, all orders must be charged to a major credit card. American Express, Visa, and MasterCard are accepted.

With approved credit, payment within thirty (30) days of invoice date is required.

Distribution Service:

In-stock items will be shipped same day of the receipt of the order if the order is received before 2 p.m. If it is not a stock item or we are temporarily out of your required product, we will immediately inform you and offer to substitute a larger size at the same price as your order requests, or give you an anticipated delivery date.

Our standard shipping methods are, and you may state your preference:

United Parcel Service (UPS ground), Airborne Express, or Common Carrier.

Conditions of Sale:

Minimum Order: \$100.00

All prices are F.O.B. shipping point, Grand Prairie, Texas. Prices are subject to change without notice.

Continued over.....

Conditions of Sale: (continued)

Sales Tax:

State laws (Texas) require **Remington laminations Incorporated** to have in our possession a valid tax exemption certificate if the customer requests tax exemption. Tax will be added if a certificate is not on file.

Returned Merchandise:

Returned goods cannot be accepted at our Distribution Center Warehouse (**DWC**) unless prior permission has been given. After receiving your request, we will determine the most economical method of handling the return. We will arrange for the receipt of the product(s) at the DWC. Please note: A 15% restocking and handling charge will be assessed for items returned for your convenience or due to your error. All goods must be freight prepaid when returned due to convenience reasons. Goods must be packaged in the original carton and returned within **thirty (30) days** of receipt of the product. If any product appears defective, please contact our office immediately. At that time we will determine the disposition of the product and the replacement or credit of the same.

Claims:

Please take immediate action if merchandise is received damaged. If merchandise is damaged, please notify the carrier, request an inspection and file a claim. Note: If the carton is damaged, the goods inside may not be. Please take a moment to check the goods as this could save both of us time and expense. Thank you.

Material Warranty:

Satisfaction is guaranteed. Should you not be completely satisfied with any of our material products, we will replace it with an identical or comparable product if returned within **thirty (30) days** from the date of shipment and in accordance with our Returned Merchandise policy.

Equipment Warranty:

Please refer to the **Remington laminations Incorporated** Manufactured Equipment Warranty at the time of equipment proposal.

Mission:

We are dedicated to provide you with personal attention. It is our desire, intention, and goal to give to each and every one of our customers the best in customer service. If at anytime you feel we have not met your interpretation of customer service, please feel free to call and ask for any management personnel of our company to discuss your concerns. We want to gain your confidence as a fair and reliable supplier with the sincere desire to keep you as a long-standing customer. Your input will always be welcome and gratefully received.

Remington laminations Incorporated

PRODUCT LISTING

| Name | Type | Description |
|------|------|-------------|
|------|------|-------------|

Section 1. Mounting Adhesives and Release Paper

| | Activation Temperature | |
|--------------------------|------------------------|---------------------------------|
| RemiMount S | Cold | High Tack Perm. /Perm. Adhesive |
| RemiMount <i>Plus</i> | Cold | High Tack Perm. /Perm. Adhesive |
| RemiMount <i>Ultra</i> | Cold | High Tack White/ Perm Adhesive |
| RemiMount OC | Cold | Optically Clear Adhesive |
| RemiMount TM | 185 °F | Hot Movable/Permanent Adhesive |
| RemiMount DM | Heat Press 170 ° | Re-positional Dry Mount Tissue |
| RemiMount DM <i>Plus</i> | Heat Press 175 ° | Permanent Dry Mount Tissue |
| RemiRelease DS | Heat Press | Double-Sided Release Paper |

Section 2. Pressure-Sensitive Laminating & Exhibit Display Films

| | | |
|------------------|------|--------------------------------|
| RemiFrost-3 | Cold | Non-Glare/Matte/3 mil |
| RemiLustre-3 | Cold | Low-Reflective/Lustre/3 mil |
| RemiChrome-3 | Cold | High Gloss/3 mil |
| RemiCrystal-3 | Cold | Scratch Res. Embossed/3 mil |
| RemiCrystal-5 | Cold | Scratch Res. Embossed/5 mil |
| RemiCrystal-10 | Cold | Scratch Res. Embossed/10 mil |
| RemiCrystal-15 | Cold | Scratch Res. Embossed/15 mil |
| RemiWrite-2 | Cold | Gloss/2 mil Dry-Erasable |
| RemiGlossy-4 | Cold | High Gloss/4 mil PVC Laminate. |
| RemiCast Clear-2 | Cold | Gloss/2 mil Cast Vinyl |

Section 3. Thermal-Sensitive Laminating/Encapsulating Films

| | | |
|-----------------|--------|-------------------------------|
| RemiGloss-1.7 | 215 °F | High Gloss/1.7 mil, Low Temp. |
| RemiGloss-3 LT | 195 °F | High Gloss/3 mil, Low Temp. |
| RemiGloss-5 LT | 195 °F | High Gloss/5 mil, Low Temp. |
| RemiGloss-10 LT | 215 °F | High Gloss/10 mil, Low Temp. |
| RemiMatte-3 LT | 195 °F | Matte/3 mil, Low Temp. |

PRODUCT LISTING

| Name | Type | Description |
|--|--------------------|--|
| Section 3. Thermal-Sensitive Laminating/Encapsulating & Exhibit Display Films | | |
| Activation Temperature | | |
| RemiSatin-3 LT (Low Temp.) | 195 ^o F | Satin-Matte/3 mil. |
| RemiSatin-5 LT (Low Temp) | 195 ^o F | Satin-Matte/5 mil. |
| RemiGuard-2 UV Lustre (Low Temp) | 190 ^o F | Lustre/2mil. Use in Roll or Heat press |
| RemiGuard-2 UV Satin-Matte (Low Temp) | 190 ^o F | Satin-Matte/2 mil (Same as above) |
| RemiJet-5 LT (Low Temp) | 195 ^o F | Embossed Hard Coat Finish/5 mil. |
| RemiJet-10 LT (Low Temp) | 215 ^o F | Embossed Hard Coat Finish/10 mil. |
| RemiLustre-5 LT HC (Low Temp) | 195 ^o F | Low-Lustre Hard Coat Surface/5 mil. |
| RemiTex-6 LT (Low Temp) | 195 ^o F | Textured Finish/6 mil. |
| RemiBlocker-10 LT (Low Temp) | 240 ^o F | White(backer)Light Blocking/10 mil |
| RemiBlocker-15 LT Low Temp) | 240 ^o F | White(backer)Light Blocking/15 mil |
| RemiBacker MB 10 | 195 ^o F | 10 Mil white paper based backer |
| RemiWrite-1 LT | 195 ^o F | Thermal Dry-Erase gloss laminate. |

Section 4. Equipment & Accessories

| | | |
|-----------------------------|--------------------------------------|------------------------------------|
| Star 44 C/S/D | 44" (106.6cm) | Mounter/Laminator-Encapsulator |
| Star 62 shr | 62" (157.4cm) | Mounter/Laminator-Heat Assist |
| Star 62 shr/m | 62" (157.4cm) | Mounter/Laminator-H/A-Roll to Roll |
| Star 62 dhr | 62" (157.4cm) | Mounter/Laminator/Encapsulator |
| StarCart 12 | 12 - 3" (7.62 cm) core, roll holders | Mobile Material Storage Cart |
| StarTrim 62 | 62" (157.4 cm) trimming width | Rotary Paper & Film Trimmer |
| Star 44 Roll-to-Roll Option | | Take-up Mandrel and Plot Holder |
| Star 62 Roll-to-Roll Option | | Take-up Mandrel and Plot Holder |
| HGP 220/260/360/560 | Up to 52"x 102" (132cm x 2590cm) | Hot Vacuum Presses |
| STA 220/260/360 | (560 stand included in press price) | Stands for Vacuum presses |

General Product Catalog All products and brand names are marks of their respective holders. Revised September 2004

SECTION 1

Mounting Adhesives

Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

PRESSURE-SENSITIVE MOUNTING ADHESIVES

| Description of Product | Size Rolls | Price | | | Part No. | Wt. Lbs. |
|---|---------------|--------|--------|--------|-------------|-------------|
| | | 1 Roll | 2 Roll | 4 Roll | | |
| RemiMount S | 25" x 300' | 265.00 | 238.00 | 212.00 | 100 025 300 | 30 |
| <i>A double-sided, self-wound pressure-sensitive permanent high tack mounting adhesive with one silicone release liner. Suitable for outdoor use.</i> | 31" x 300' | 331.00 | 298.00 | 265.00 | 100 031 300 | 32 |
| | 33" x 300' | 331.00 | 298.00 | 265.00 | 100 033 300 | 33 |
| | 38" x 300' | 402.00 | 362.00 | 322.00 | 100 038 300 | 42 |
| | 41" x 300' | 415.00 | 374.00 | 332.00 | 100 041 300 | 45 |
| | 43" x 300' | 425.00 | 384.00 | 342.00 | 100 043 300 | 48 |
| | 51" x 300' | 445.00 | 401.00 | 356.00 | 100 051 300 | 58 |
| | 55" x 300' | 475.00 | 421.00 | 376.00 | 100 055 300 | 65 |
| | 61" x 150' | 363.00 | 333.00 | 268.00 | 100 061 150 | 40 |

RemiMount S has an all-purpose cold mounting adhesive formulated to give excellent hold-down strength on substrates such as foam or gatorboard and art board. Ideal for permanent mounting of electrostatic, ink jet and photographic materials. High Initial tack.

| | | | | | | |
|---|------------|--------|--------|--------|-------------|----|
| RemiMount Plus | 16" x 300' | 177.00 | 167.00 | 157.00 | 101.016.300 | 16 |
| <i>A double-sided, self-wound pressure-sensitive permanent high tack mounting adhesive with one silicone release liner. Suitable for outdoor use.</i> | 25" x 300' | 315.00 | 284.00 | 252.00 | 101 025 300 | 30 |
| | 33" x 300' | 415.00 | 374.00 | 332.00 | 101 033 300 | 35 |
| | 38" x 300' | 458.00 | 412.00 | 366.00 | 101 038 300 | 42 |
| | 41" x 300' | 485.00 | 437.00 | 388.00 | 101 041 300 | 45 |
| | 51" x 300' | 550.00 | 495.00 | 440.00 | 101 051 300 | 58 |
| | 55" x 300' | 599.00 | 539.00 | 479.00 | 101 055 300 | 65 |

RemiMount P has an all-purpose cold mounting adhesive formulated for most applications. It will accommodate a variety of substrates, including PVC constructed materials such as Lexan® and Sintra®. Perfectly suited for permanent applications of all general graphic output.

| | | | | | | |
|--|------------|--------|--------|--------|-------------|----|
| RemiMount Ultra | 25" x 300' | 414.00 | 331.00 | 265.00 | 102 025 300 | 35 |
| <i>A double-sided, self-wound pressure-sensitive permanent high tack mounting adhesive on a white carrier with one silicone release liner.</i> | 38" x 150' | 300.00 | 265.00 | 193.00 | 102 038 150 | 28 |
| | 38" x 300' | 600.00 | 480.00 | 386.00 | 102 038 300 | 43 |
| | 41" x 300' | 660.00 | 528.00 | 410.00 | 102 041 300 | 46 |
| | 51" x 300' | 790.00 | 632.00 | 510.00 | 102 051 300 | 68 |
| | 54" x 300' | 810.00 | 652.00 | 540.00 | 102 054 300 | 72 |
| | 61" x 150' | 610.00 | 488.00 | 403.00 | 102.061.150 | 41 |

RemiMount Ultra, our finest all-purpose cold mounting adhesive is coated on a white polypropylene carrier to obtain maximum quality images on all substrates. At the same instant, this white carrier assists in producing the smoothest adhesive lay down to reduce any "orange-peel" effect. The very best mounting adhesive for permanent applications and outside use for all general graphic output.

All sizes are wound on 3" ID cores.

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

PRESSURE-SENSITIVE MOUNTING ADHESIVES

| Description of Product | Size Rolls | Price | | | Part No. | Wt. Lbs. |
|---|---------------|--------|--------|--------|-------------|-------------|
| | | 1 Roll | 2 Roll | 4 Roll | | |
| RemiMount OC | | | | | | |
| <i>An optically clear pressure-sensitive mounting adhesive with two poly film release liners.</i> | 13" x 150' | 160.00 | 152.00 | 144.00 | 104 013 150 | 9 |
| | 25" x 150' | 321.00 | 305.00 | 290.00 | 104 025 150 | 16 |
| | 38" x 150' | 540.00 | 513.00 | 486.00 | 104 038 150 | 24 |
| | 51" x 150' | 632.00 | 599.00 | 569.00 | 104 051 150 | 33 |
| | 54" x 150' | 664.00 | 631.00 | 599.00 | 104 054 150 | 38 |
| | 60" x 150' | 764.00 | 731.00 | 699.00 | 104 060 150 | 45 |

RemiMount OC is specifically designed for face mounting graphic images in back-lit applications using substrates such as Plexiglas® and/or other transparent products. A very high quality optically clear adhesive.

THERMAL-SENSITIVE MOUNTING ADHESIVES

| Description of Product | Size Rolls | Price | | | Part No. | Wt. Lbs. |
|---|---------------|--------|---------|---------|-------------|-------------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiMount TM | | | | | | |
| <i>A heat activated self-wound mounting adhesive with a "tacky" surface and one silicone release liner.</i> | 25" x 328' | 300.00 | 275.00 | 240.00 | 112 025 328 | 20 |
| | 38" x 328' | 500.00 | 360.00 | 350.00 | 112 038 328 | 28 |
| | 41" x 328' | 525.00 | 425.00 | 380.00 | 112 041 328 | 30 |
| | 51" x 328' | 600.00 | 477.00 | 424.00 | 112 051 328 | 37 |

RemiMount TM is a general use hot mounting adhesive formulated to give excellent hold-down strength on substrates such as foam or gatorboard and art board. With the prepared "tacky" surface, the accurate re-positioning of graphics can be achieved while permanently mounting ink jet, electrostatic and photographic materials. When pre-coated to a substrate, one-pass mounting and laminating can be achieved.

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

THERMAL-SENSITIVE DRY MOUNTING TISSUE AND SILICONE RELEASE PAPER FOR HEAT PRESS APPLICATIONS

| Description of Product | Size Rolls | Price | | | Part No. | Wt. lbs. |
|---|---------------|--------|---------|---------|-------------|-------------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiMount DM | 24.5"x 150' | 63.00 | 60.00 | 57.00 | 110 024 150 | 7 |
| <i>A heat-activated general use dry mounting tissue. An excellent heat press product.</i> | 24.5"x 300' | 123.00 | 117.00 | 111.00 | 110 024 300 | 14 |
| | 40.5"x 150' | 98.00 | 93.00 | 88.00 | 110 040 150 | 10 |
| | 40.5"x 300' | 188.00 | 79.00 | 169.00 | 110 040 300 | 20 |
| <u>Permanent/Removable</u> | 42.5"x 150' | 105.00 | 100.00 | 95.00 | 110 042 150 | 11 |
| | 42.5"x 300' | 198.00 | 188.00 | 178.00 | 110 042 300 | 22 |
| | 48.5"x 150' | 127.00 | 121.00 | 114.00 | 110 048 150 | 13 |
| | 48.5"x 300' | 240.00 | 228.00 | 216.00 | 110 048 300 | 26 |

RemiMount DM is a general use heat-activated dry mounting tissue for use in heat press equipment. It is breathable and reversible with a dwell time of 2-3 minutes at temperatures between 165° F (73.8° C) and 175° F (79.4° C). This product can be removed or re-positioned at 200° F (93.3° C). Excellent for mounting photographs, electrostatic images and plain paper to foam board or gatorboard.

| | | | | | | |
|---|-------------|--------|--------|--------|-------------|----|
| RemiMount DM Plus | 24.5"x 150' | 108.00 | 88.00 | 77.00 | 111 024 150 | 10 |
| <i>A heat-activated high quality dry mounting tissue.</i> | 24.5"x 300' | 163.00 | 153.00 | 143.00 | 111 024 300 | 12 |
| | 36.5"x 300' | 211.00 | 201.00 | 191.00 | 111 036 300 | 18 |
| <i>A superb heat press product.</i> | 40.5"x 150' | 148.00 | 138.00 | 128.00 | 111 040 150 | 12 |
| <u>Permanent</u> | 40.5"x 300' | 276.00 | 266.00 | 256.00 | 111 040 300 | 22 |
| | 42.5"x 150' | 158.00 | 148.00 | 138.00 | 111 042 150 | 14 |
| | 42.5"x 300' | 296.00 | 286.00 | 276.00 | 111 042 300 | 24 |
| | 48.5"x 150' | 168.00 | 158.00 | 148.00 | 111 048 150 | 16 |
| | 48.5"x 300' | 336.00 | 316.00 | 296.00 | 111 048 300 | 32 |

RemiMount DM Plus is an extremely high quality heat-activated dry mounting tissue for use in heat press equipment. It is a breathable, porous, permanent bond mounting material with a dwell time of 1 1/2 to 2 minutes at temperatures between 175° F (79.4° C) and 195° F (90.5° C). The superb "lay flat" quality of DM Plus provides for simple and easy mounting of photographs, electrostatic images and plain paper to foam board or gatorboard.

| | | | | | | |
|---|-----------|--------|--------|--------|-------------|----|
| RemiRelease DS | 34"x 105' | 98.00 | 93.00 | 88.00 | 120 034 105 | 8 |
| <i>A double-sided silicone release paper.</i> | 42"x 105' | 123.00 | 117.00 | 111.00 | 120 042 105 | 10 |
| | 50"x 105' | 148.00 | 141.00 | 133.00 | 120 050 105 | 12 |

When dry mounting, protect your heat press from the accumulation of excess adhesive with this high quality double-sided release paper.

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

SECTION 2

Pressure-Sensitive Laminates & Vinyls

Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

PRESSURE-SENSITIVE LAMINATING FILMS FOR GRAPHIC OUTPUT PROTECTION

| Description of Product | Size Rolls | Price | | | Part No. | Wt. lbs. |
|---|---------------|--------|---------|---------|-------------|-------------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiFrost-3 | | | | | | |
| | 25" x 150' | 166.00 | 151.00 | 138.00 | 200 025 150 | 12 |
| <i>3 mil semi-matte laminating</i> | 33" x 150' | 210.00 | 191.00 | 174.00 | 200 033 150 | 18 |
| <i>film with a pressure-sensitive,</i> | 38" x 150' | 272.00 | 247.00 | 225.00 | 200 038 150 | 22 |
| <i>permanent UV resistant adhesive.</i> | 41" x 150' | 293.00 | 266.00 | 242.00 | 200 041 150 | 33 |
| | 51" x 150' | 319.00 | 290.00 | 264.00 | 200 051 150 | 41 |
| | 54" x 150' | 348.00 | 316.00 | 288.00 | 200 054 150 | 44 |
| | 61" x 150' | 381.00 | 346.00 | 315.00 | 200 061 150 | 48 |

RemiFrost-3 is manufactured with a satin matte surface to remove light reflection while maintaining color integrity. Ideal for the protection of exhibit hall graphics where uncontrolled lighting glare is a persistent problem.

RemiLustre-3

| | | | | | | |
|---|------------|--------|--------|--------|-------------|----|
| | 25" x 150' | 166.00 | 151.00 | 138.00 | 205 025 150 | 12 |
| <i>3 mil semi-gloss laminating</i> | 33" x 150' | 210.00 | 191.00 | 174.00 | 205 033 150 | 18 |
| <i>film with a pressure sensitive,</i> | 38" x 150' | 272.00 | 247.00 | 225.00 | 205 038 150 | 22 |
| <i>permanent UV resistant adhesive.</i> | 41" x 150' | 293.00 | 266.00 | 242.00 | 205 041 150 | 33 |
| | 51" x 150' | 319.00 | 290.00 | 264.00 | 205 051 150 | 41 |
| | 51" x 300' | 638.00 | 580.00 | 468.00 | 205 051 300 | 80 |
| | 54" x 150' | 348.00 | 316.00 | 288.00 | 205 054 150 | 44 |
| | 61" x 150' | 381.00 | 346.00 | 315.00 | 205 061 150 | 40 |

RemiLustre-3 is manufactured with a lustre finish to enhance color contrast while reducing unwanted lighting glare prominent in exhibit halls.

RemiChrome-3

| | | | | | | |
|--|------------|--------|--------|--------|-------------|----|
| | 25" x 150' | 211.00 | 192.00 | 175.00 | 201 025 150 | 12 |
| <i>3 mil high gloss laminating</i> | 33" x 150' | 273.00 | 259.00 | 246.00 | 201 033 150 | 18 |
| <i>film with a pressure-sensitive,</i> | 38" x 150' | 297.00 | 270.00 | 264.00 | 201 038 150 | 19 |
| <i>permanent acrylic UV resistant</i> | 41" x 150' | 338.00 | 308.00 | 280.00 | 201 041 150 | 33 |
| <i>adhesive.</i> | 51" x 150' | 395.00 | 359.00 | 327.00 | 201 051 150 | 41 |
| | 54" x 150' | 430.00 | 391.00 | 356.00 | 201 054 150 | 44 |

RemiChrome-3 is a high gloss laminate with a perfect formulation to bring added color enhancement to the otherwise "not so bright " images in duller plots and other graphics. Excellent for the protection and enhancement of most types of graphic output.

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective September 2004

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

PRESSURE-SENSITIVE LAMINATING FILMS FOR GRAPHIC OUTPUT PROTECTION

| Description of Product | Size Roll | Price | | | Part No. | Wt. lbs. |
|---|--------------|--------|---------|---------|-------------|-------------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiWrite-2 | 13"x 150' | 76.00 | 66.00 | 56.00 | 208.013.150 | 6 |
| | 16"x 150' | 96.00 | 86.00 | 76.00 | 208.016.150 | 10 |
| <i>2.0 mil gloss surface laminating film with a dry erasable write-on/ wipe-off feature and a pressure- sensitive permanent adhesive.</i> | 25"x 150' | 152.00 | 144.00 | 137.00 | 208 025 150 | 12 |
| | 38"x 150' | 239.00 | 227.00 | 216.00 | 208 038 150 | 17 |
| | 41"x 150' | 263.00 | 250.00 | 238.00 | 208 041 150 | 19 |
| | 51"x 150' | 303.00 | 288.00 | 274.00 | 208 051 150 | 23 |
| | 54"x 150' | 318.00 | 303.00 | 288.00 | 208 054 150 | 25 |

RemiWrite-2 is manufactured with a high gloss surface featuring a dry erasable write-on/wipe-off capability while maintaining excellent graphic enhancement. Ideal for presentations where the need for instant highlighting and easy marker removal is required.

| | | | | | | |
|--|-----------|--------|--------|--------|-------------|-----|
| RemiGlossy-4 | 25"x 150' | 208.00 | 187.00 | 166.00 | 209 025 150 | 12 |
| <i>4 mil PVC GLOSSY laminating film with a superior pressure-sensitive, permanent UV resistant adhesive.</i> | 33"x 150' | 262.00 | 236.00 | 209.00 | 209 033 150 | 18 |
| | 38"x 150' | 308.00 | 277.00 | 246.00 | 209 038 150 | 22 |
| | 41"x 150' | 364.00 | 327.00 | 291.00 | 209 041 150 | 33 |
| | 51"x 150' | 396.00 | 356.00 | 317.00 | 209 051 150 | 41 |
| | 54"x 150' | 432.00 | 389.00 | 346.00 | 209 054 150 | 44 |
| | 54"x 300' | 864.00 | 778.00 | 691.00 | 209 054 300 | 70 |
| | 61"x 150' | 916.00 | 824.00 | 732.00 | 209 061 300 | 100 |

RemiGlossy-4 is a high gloss PVC laminate formulated to bring added color enhancement to the otherwise "not so bright" images in duller plots and other graphics. Excellent for the protection and enhancement of most types of graphic output. Ideal for outdoor use and for coverage of printed vinyl media.

RemiCast Clear-2

| | | | | | | |
|---|-----------|--------|--------|--------|-------------|----|
| <i>2.0 clear gloss CAST VINYL laminating film with a pressure sensitive permanent adhesive. Ideal for outdoor use and vehicle graphics.</i> | 50"x 150' | 575.00 | 555.00 | 525.00 | 220 050 150 | 28 |
|---|-----------|--------|--------|--------|-------------|----|

RemiCast Clear-2 is manufactured with a high quality cast vinyl suited for laminating cast vinyl vehicle graphics. This product will help protect your vehicle graphics from the elements.

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

PRESSURE-SENSITIVE EMBOSSED FILMS FOR VERTICAL GRAPHICS & POP-UP DISPLAY APPLICATIONS

| Description of Product | Size Rolls | Price | | | Part No. | Wt. lbs. |
|---|------------|--------|---------|---------|-------------|----------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiCrystal-3 | | | | | | |
| | 13"x 150' | 89.00 | 79.00 | 69.00 | 202.013.150 | 6 |
| | 16"x 150' | 109.00 | 99.00 | 89.00 | 202.016.150 | 10 |
| | 38"x 150' | 266.00 | 254.00 | 242.00 | 202 038 150 | 21 |
| <i>3 mil semi-matte, scratch resistant embossed PVC film with a UV pressure-sensitive adhesive.</i> | 41"x 150' | 280.00 | 266.00 | 254.00 | 202 041 150 | 24 |
| | 51"x 150' | 298.00 | 283.00 | 268.00 | 202 051 150 | 32 |
| | 54"x 150' | 331.00 | 314.00 | 298.00 | 202 054 150 | 37 |
| RemiCrystal-5 | | | | | | |
| | 13"x 150' | 97.00 | 87.00 | 77.00 | 203.013.150 | 10 |
| | 16"x 150' | 117.00 | 107.00 | 97.00 | 203.016.150 | 15 |
| | 38"x 150' | 293.00 | 279.00 | 266.00 | 203 038 150 | 29 |
| <i>5 mil semi-matte scratch resistant embossed PVC film with a UV pressure-sensitive adhesive.</i> | 41"x 150' | 307.00 | 229.00 | 279.00 | 203 041 150 | 33 |
| | 51"x 150' | 369.00 | 351.00 | 332.00 | 203 051 150 | 43 |
| | 54"x 150' | 397.00 | 377.00 | 357.00 | 203 054 150 | 49 |
| RemiCrystal-10 | | | | | | |
| | 13"x 100' | 136.00 | 126.00 | 116.00 | 204.013.100 | 10 |
| | 16"x 100' | 156.00 | 146.00 | 136.00 | 204.016.100 | 15 |
| | 38"x 100' | 408.00 | 388.00 | 367.00 | 204 038 100 | 30 |
| <i>10 mil semi-matte scratch resistant embossed PVC film with a UV pressure-sensitive adhesive.</i> | 41"x 100' | 445.00 | 423.00 | 410.00 | 204 041 100 | 35 |
| | 51"x 100' | 490.00 | 465.00 | 441.00 | 204 051 100 | 45 |
| | 54"x 100' | 544.00 | 517.00 | 490.00 | 204 054 100 | 51 |
| RemiCrystal-15 | | | | | | |
| | 13"x 100' | 150.00 | 140.00 | 130.00 | 207.013.100 | 13 |
| | 16"x 100' | 170.00 | 160.00 | 150.00 | 207.016.100 | 17 |
| | 22"x 100' | 236.00 | 224.00 | 212.00 | 207.022.100 | 25 |
| | 32"x 100' | 353.00 | 336.00 | 318.00 | 207.032.100 | 35 |
| | 38"x 100' | 452.00 | 430.00 | 407.00 | 207 038 100 | 44 |
| <i>15 mil semi-matte scratch resistant embossed film with a UV pressure-sensitive adhesive.</i> | 41"x 100' | 493.00 | 468.00 | 444.00 | 207 041 100 | 51 |
| | 51"x 100' | 526.00 | 499.00 | 473.00 | 207 051 100 | 65 |
| | 54"x 100' | 589.00 | 560.00 | 530.00 | 207 054 100 | 73 |

All RemiCrystal products are slightly textured (embossed) laminates with a permanent adhesive and are ideal for floor graphic applications. Recognized by Underwriters Laboratories (U.L.). RemiCrystal is also ideal for vertical graphics and pop-up display applications, which require a tough scratch resistant, non-glare, finish. The solid PVC base eliminates any surface flaking. Perfect for ink jet and other graphic media. It is tough, flexible and durable. Ideal for use with adhesive backed vinyl.

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

SECTION 3

Thermal-Sensitive Laminating Films

Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

THERMAL-SENSITIVE CLEAR LAMINATING FILMS FOR GRAPHIC OUTPUT PROTECTION

| Description of Product | Size Roll | Price | | | Part No. | Wt. lbs. |
|---|-------------|----------------------------------|---------|---------|--------------|----------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiGloss-1.7 | | | | | | |
| <i>1.7 mil high gloss laminating</i> | 25" x 1000' | 124.00 | 99.00 | 85.00 | 401 025 1000 | 20 |
| <i>and/or encapsulating film with a</i> | 38" x 1000' | 190.00 | 152.00 | 130.00 | 401 038 1000 | 30 |
| <i>standard-temperature, heat-activated</i> | 51" x 1000' | 255.00 | 204.00 | 175.00 | 401 043 1000 | 40 |
| <i>UV protected adhesive. Minimum</i> | 55" x 1000' | 274.00 | 219.00 | 190.00 | 401 051 1000 | 45 |
| <i>Suggested operating temperature,</i> | | | | | | |
| <i>215 °F (85.0 °C)</i> | | | | | | |
| RemiGloss-3 LT | | | | | | |
| <i>3 mil high gloss laminating</i> | 38" x 250' | 81.00 | 77.00 | 73.00 | 433 038 250 | 19 |
| <i>And/or encapsulating film with a</i> | 38" x 500' | 162.00 | 154.00 | 146.00 | 433 038 500 | 42 |
| <i>Low temperature, heat-activated</i> | 43" x 250' | 92.00 | 88.00 | 83.00 | 433 043 250 | 21 |
| <i>UV protected adhesive. Minimum</i> | 43" x 500' | 184.00 | 176.00 | 166.00 | 433 043 500 | 21 |
| <i>Suggested operating temperature,</i> | 51" x 250' | 109.00 | 104.00 | 98.00 | 433 051 250 | 25 |
| <i>195 °F (85.0 °C)</i> | 55" x 250' | 115.00 | 109.00 | 104.00 | 433 055 250 | 29 |
| | 60" x 250' | 133.00 | 121.00 | 110.00 | 433 060 250 | 33 |
| RemiGloss-5 LT(3/2) | | | | | | |
| <i>5 mil high gloss laminating</i> | 25" x 250' | 92.00 | 85.00 | 75.00 | 435 025 250 | 18 |
| <i>and/or encapsulating film with a</i> | 38" x 250' | 124.00 | 113.00 | 103.00 | 435 038 250 | 26 |
| <i>low temperature, heat-activated</i> | 43" x 250' | 142.00 | 126.00 | 115.00 | 435 043 250 | 30 |
| <i>UV protective adhesive. Minimum</i> | 51" x 250' | 162.00 | 148.00 | 136.00 | 435 051 250 | 34 |
| <i>Suggested operating temperature,</i> | 55" x 250' | 170.00 | 160.00 | 146.00 | 435 055 250 | 39 |
| <i>195 °F (87.7 °C)</i> | 60" x 250' | 192.00 | 176.00 | 159.00 | 435 060 250 | 42 |
| | | **500 foot rolls also available. | | | | |
| RemiGloss-10 LT | | | | | | |
| <i>10 mil high gloss laminating</i> | 25" x 250' | 166.00 | 149.00 | 135.00 | 437 025 250 | 40 |
| <i>and/or encapsulating film with a</i> | 38" x 250' | 249.00 | 227.00 | 206.00 | 437 038 250 | 50 |
| <i>low temperature, heat-activated</i> | 43" x 250' | 283.00 | 257.00 | 234.00 | 437 043 250 | 60 |
| <i>UV protective adhesive. Minimum</i> | 51" x 250' | 335.00 | 305.00 | 277.00 | 437 051 250 | 72 |
| <i>Suggested operating temperature</i> | 55" x 250' | 359.00 | 329.00 | 299.00 | 437 055 250 | 78 |
| <i>210 °F (98.8 °C)</i> | | | | | | |

RemiGloss (LT) low temperature laminates are excellent quality high gloss heat-activated films with UV protection for lamination and encapsulation of ink jet media and other materials sensitive to high heat laminates. Manufactured specifically for ink jet graphic output and recommended for use in a heated roller type mounter/laminator.

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

THERMAL-SENSITIVE SATIN & MATTE LAMINATING FILMS FOR GRAPHIC OUTPUT PROTECTION

| Description of Product | Size Roll | Price | | | Part No. | Wt. lbs. |
|--|------------|--------|---------|---------|-------------|----------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiMatte-3 LT | | | | | | |
| <i>3 mil matte laminating and/or encapsulating film with a low temperature, heat-activated adhesive.</i> | 38" x 250' | 118.00 | 107.00 | 97.00 | 443 038 250 | 18 |
| | 38" x 500' | 236.00 | 214.00 | 194.00 | 443 038 500 | 25 |
| | 43" x 250' | 132.00 | 120.00 | 109.00 | 443 043 250 | 21 |
| <i>Suggested operating temperature, 195 °F (85.0 °C)</i> | 43" x 500' | 264.00 | 240.00 | 218.00 | 443 043 500 | 35 |
| | 51" x 250' | 158.00 | 143.00 | 130.00 | 443 051 250 | 25 |
| | 51" x 500' | 316.00 | 286.00 | 260.00 | 443 051 500 | 43 |
| | 55" x 250' | 168.00 | 152.00 | 137.00 | 443 055 250 | 27 |
| | 55" x 500' | 336.00 | 304.00 | 274.00 | 443 055 500 | 46 |
| RemiSatin-3 LT | | | | | | |
| <i>3 mil satin sheen laminating and/or encapsulating film with a low temperature heat-activated UV adhesive.</i> | 38" x 250' | 101.00 | 92.00 | 84.00 | 449 038 250 | 19 |
| | 38" x 500' | 202.00 | 184.00 | 168.00 | 449 038 500 | 19 |
| <i>Suggested operating temperature, 195 °F (85.0 °C)</i> | 43" x 250' | 112.00 | 102.00 | 93.00 | 449 043 250 | 21 |
| | 43" x 500' | 224.00 | 204.00 | 186.00 | 449 043 500 | 21 |
| | 51" x 250' | 134.00 | 122.00 | 111.00 | 449 051 250 | 25 |
| | 51" x 500' | 268.00 | 244.00 | 222.00 | 449 051 500 | 25 |
| | 55" x 250' | 145.00 | 132.00 | 120.00 | 449 055 250 | 27 |
| | 55" x 500' | 290.00 | 264.00 | 240.00 | 449 055 500 | 43 |
| | 60" x 250' | 159.00 | 144.00 | 131.00 | 449 060 250 | 29 |
| RemiSatin-5 LT | | | | | | |
| <i>5 mil satin sheen laminating and/or encapsulating film with a low temperature heat-activated UV adhesive.</i> | 25" x 250' | 144.00 | 137.00 | 130.00 | 450 025 250 | 18 |
| | 38" x 250' | 215.00 | 204.00 | 194.00 | 450 038 250 | 26 |
| <i>Suggested operating temperature, 195 °F (87.7 °C)</i> | 43" x 250' | 240.00 | 228.00 | 217.00 | 450 043 250 | 30 |
| | 43" x 500' | 480.00 | 456.00 | 434.00 | 450 043 500 | 30 |
| | 51" x 250' | 285.00 | 271.00 | 257.00 | 450 051 250 | 34 |
| | 51" x 500' | 570.00 | 542.00 | 514.00 | 450 051 500 | 34 |
| | 55" x 250' | 307.00 | 292.00 | 277.00 | 450 055 250 | 39 |
| | 55" x 500' | 614.00 | 584.00 | 554.00 | 450 055 500 | 39 |
| | 60" x 250' | 335.00 | 318.00 | 302.00 | 450 060 250 | 42 |
| RemiWrite-1.5 | | | | | | |
| <i>Thermal gloss DRY-ERASE encapsulating film. Minimum Suggested operating temperature 215 °F (87.7 °C)</i> | 38" x 500' | 144.00 | 137.00 | 130.00 | 402 038 500 | 18 |
| | 51" x 500' | 215.00 | 204.00 | 194.00 | 402 051 500 | 26 |
| | 55" x 500' | 240.00 | 228.00 | 217.00 | 402 055 500 | 30 |

These LT (low temperature) and standard temperature laminates are excellent quality heat-activated films for lamination and encapsulation of ink jet and photographic media. RemiMatte is ideal for mounted graphics displaying mostly text rather than creative images where the need is to be easily read without any reflective glare. Recommended for use in a heated roller type moulder/laminator. Minimum suggested operating temperature 195 °F (87.7 °C).

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective August 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

THERMAL SENSITIVE LOW-TEMPERATURE FILMS FOR DISPLAY GRAPHICS/POP-UP DISPLAY APPLICATIONS

| Description of Product | Size Rolls | Price | | | Part No. | Wt. lbs. |
|---|---------------|--------|---------|---------|-------------|-------------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiJet-5 LT | 38" x 150' | 390.00 | 345.00 | 295.00 | 461.038.150 | 20 |
| <i>5 mil low temperature, embossed, hard coat laminating film with an activating temperature of 195° F and a UV protectant adhesive. HIGH QUALITY medium weight, scratch resistant display laminate.</i> | 51" x 150' | 522.00 | 441.00 | 421.00 | 461.051.150 | 37 |
| Use with RemiBlocker-10 LT | | | | | | |
| RemiJet-10 LT | 38" x 150' | 612.00 | 489.00 | 375.00 | 462.038.150 | 39 |
| <i>10 mil low temperature, "embossed" hard coat laminating film with an activating temperature of 210 F and a UV protectant adhesive. HIGH QUALITY heavy weight, scratch resistant display laminate.</i> | 51" x 150' | 822.00 | 657.00 | 501.00 | 462.051.150 | 69 |
| Special Order Item. Available upon request Use with RemiBlocker-15 LT to make EXHIBIT/DISPLAY PANELS. | | | | | | |
| RemiTex-6 LT | 38" x 250' | 598.00 | 498.00 | 398.00 | 464.038.250 | |
| <i>6 mil low temperature, "textured" laminating film with an activating temperature of 195° F and a UV protectant adhesive. Ideal medium weight, scratch resistant display laminate.</i> | 51" x 250' | 698.00 | 598.00 | 498.00 | 464.051.250 | |
| | 55" x 250' | 798.00 | 698.00 | 598.00 | 464.055.250 | |
| Use with RemiBlocker-10 LT to make EXHIBIT/DISPLAY PANELS. | | | | | | |
| RemiLustre-5 LT HC | 38" x 250' | 598.00 | 498.00 | 398.00 | 475.038.250 | |
| <i>5 mil low temperature, "hardcoat" surface laminating film with an activating temperature of 195° F and a UV protectant adhesive. This unique HIGH QUALITY low lustre, scratch resistant surface is an excellent choice for large exhibit graphics.</i> | 51" x 250' | 698.00 | 598.00 | 498.00 | 475.051.250 | |
| | 55" x 250' | 798.00 | 698.00 | 598.00 | 475.055.250 | |
| Also Available in a 10 mil Use with RemiBlocker-10 LT to make EXHIBIT/DISPLAY PANELS. | | | | | | |

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective September 2004

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

THERMAL SENSITIVE LOW-TEMPERATURE LIGH BLOCKING FILMS FOR DISPLAY GRAPHICS/POP-UP DISPLAY APPLICATIONS

| Description of Product | Size Rolls | Price | | | Part No. | Wt. lbs. |
|--|--------------------------|---|------------------|------------------|----------------------------|-------------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiBlocker-10 LT <i>10 mil white, light-blocking (backer) laminating film with an activation temperature of 210° F. An ideal companion for the REMIJET-5 in the creation of pop-up displays.</i> | 38" x 250' 51" x 250' | 690.00 722.00 | 512.00 617.00 | 405.00 545.00 | 467.038.250 467.051.250 | |
| | | *Special Order Item. Available upon request | | | | |
| RemiBlocker-15 LT <i>15 mil white, light-blocking (backer) laminating film with an activation temperature of 215° F. An ideal companion for the REMIJET-10 in the creation of pop-up displays.</i> | 38" x 150' 51" x 150' | 600.00 900.00 | 536.00 720.00 | 477.00 595.00 | 468.038.150 468.051.150 | |
| | | *Special Order Item. Available upon request | | | | |
| RemiBacker MB <i>10 mil white, paper based backing film with an activation temperature of 195° F. An ideal product for short term POP graphics and indoor posters.</i> | 38" x 250' | 196.00 | 176.00 | 156.00 | 460.038.250 | |
| RemiMatte-5 (1/4) <i>5 mil standard temperature "Matte" Finish laminating film with a UV Inhibiting adhesive.</i> | 38" x 250' 51" x 250' | 169.00 226.00 | 149.00 206.00 | 129.00 176.00 | 415.038.250 415.051.250 | |

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington laminations Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

THERMAL-SENSITIVE SATIN & LUSTRE LAMINATING FILMS FOR GRAPHIC OUTPUT PROTECTION

*** Ideal for canvas bonding or a vinyl banner over-laminate ***

| Description of Product | Size Roll | Price | | | Part No. | Wt. lbs. |
|--|--------------|--------|---------|---------|-------------|-------------|
| | | 1 roll | 2 rolls | 4 rolls | | |
| RemiGuard-2 UV Lustre | | | | | | |
| <i>2 mil low temperature laminate</i> | 25" x 164' | 143.00 | 136.00 | 129.00 | 451 025 164 | 12 |
| <i>with added UV protection, one</i> | 41" x 164' | 251.00 | 238.00 | 226.00 | 451 041 164 | 18 |
| <i>silicone liner and a heat-activated</i> | 51" x 164' | 278.00 | 264.00 | 249.00 | 451 051 164 | 28 |
| <i>permanent adhesive. Suggested operating</i> | | | | | | |
| <i>temperature 185-190 °F (85.0-87.7 °C)</i> | | | | | | |
| RemiGuard-2 UV Satin Matte | | | | | | |
| <i>2 mil low temperature laminate</i> | 25" x 164' | 150.00 | 143.00 | 136.00 | 454 025 164 | 12 |
| <i>with added UV protection, one</i> | 41" x 164' | 264.00 | 251.00 | 238.00 | 454 041 164 | 18 |
| <i>silicone liner and a heat-activated</i> | 51" x 164' | 292.00 | 278.00 | 262.00 | 454 051 164 | 28 |
| <i>permanent adhesive. Suggested operating</i> | | | | | | |
| <i>temperature 185-190 °F (85.0-87.7 °C)</i> | | | | | | |
| RemiGuard-2 UV Lustre (Perforated) | | | | | | |
| <i>2 mil low temperature laminate</i> | 25" x 164' | 143.00 | 136.00 | 129.00 | 452 025 164 | 12 |
| <i>with added UV protection, one</i> | 41" x 164' | 251.00 | 238.00 | 226.00 | 452 041 164 | 18 |
| <i>silicone liner and a heat-activated</i> | 49" x 164' | 278.00 | 264.00 | 249.00 | 452 049 164 | 28 |
| <i>permanent adhesive. Suggested operating</i> | | | | | | |
| <i>temperature 185-190 °F (85.0-87.7 °C)</i> | | | | | | |
| RemiGuard-2 UV Satin Matte (Perforated) | | | | | | |
| <i>2 mil low temperature laminate</i> | 25" x 164' | 150.00 | 143.00 | 136.00 | 455 041 164 | 12 |
| <i>with added UV protection, one</i> | 41" x 164' | 264.00 | 251.00 | 238.00 | 455 041 164 | 18 |
| <i>silicone liner and a heat-activated</i> | 49" x 164' | 292.00 | 278.00 | 262.00 | 455 049 164 | 28 |
| <i>permanent adhesive. Suggested operating</i> | | | | | | |
| <i>temperature 185-190 °F (85.0-87.7 °C)</i> | | | | | | |

RemiGuard Lustre & Satin Matte laminates are quality low temperature heat-activated films for lamination and encapsulation of ink jet, electrostatic and photographic media. These laminates are used extensively in the framing industry. Pre-pierced (perforated) for use in a dry mount or hot vacuum press. Can be used (un-pierced) in a heated roller type mouter/laminator. Note: Temperatures are for reference only.

All sizes are wound on 3" I.D. cores.

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

SECTION 4

Equipment and Accessories

Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated
Remington *laminations* Incorporated

Remington *laminations* Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

MOUNTER / LAMINATORS

| Model & Part # | Description of Product | Commercial Price | Ship Wt. |
|--|--|-----------------------------|---------------------|
| <i>Star 44 C</i> 700 044 001 | Mounter/Laminator with two pressure rollers. Two self locking supply mandrels and one take mandrel. Max working width, 44" (106.6 cm) Max substrate thickness 5/8" (1.58 cm) | \$ 7,500.00 | 380 lbs. |
| <i>Star 44 SHR</i> 700 044 002 | Mounter/Laminator with a top heated pressure roller. Two self-locking supply mandrels and one take-up mandrel. Max working width, 44" (106.6 cm) Max substrate thickness 5/8" (1.58 cm) Max temperature, 275 F (135 C) | \$ 7,995.00 | 380 lbs |
| <i>Star 44 DHR</i> 700 044 003 | Mounter/Laminator/Encapsulator with dual heated pressure rollers. Two self-locking supply mandrels and two heated pressure rollers. Max working width, 44" (106.6 cm) Max substrate thickness 5/8" (1.58 cm) Max temperature, 275 F (135 C) | \$ 10,500.00 | 410 lbs |
| <i>Star 62c</i> 700 062 000 | Mounter/Laminator. Cold Only Model. Full 62" (157.4 cm) working width. | \$ 11,500.00 | 810 lbs. |
| <i>Star 62shr</i> 700 062 001 | Mounter/Laminator with top heated roller and a temperature variance of up to 275 F (135 C). Full 62" (157.4 cm) working width. | \$ 14,500.00 | 810 lbs. |
| <i>Star 62dhr</i> 700 062 003 | Mounter/Laminator/Encapsulator with two heated pressure rollers and two film pull rollers. Temperature variance of up to 275 F (135 C). Full 62" (157.4 cm) working width. | \$ 17,500.00 | 1,010 lbs. |

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington *laminations* Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

VACUUM PRESSES For MOUNTING, HEATSEALING, AND CANVAS BONDING

| Model & Part # | Description of Product | Commercial Price | Ship Wt. |
|--------------------------------------|---|-----------------------------|---------------------|
| <i>HGP 220</i> 750 026 038 | Hot Vacuum Press Diaphragm Area: 26" x 38" (660 mm x 965 mm) | \$ 3,995.00 | 148 lbs. |
| <i>HGP 260</i> 750 036 048 | Hot Vacuum Press Diaphragm Area: 36" x 48" (915 mm x 1,230 mm) | \$ 4,795.00 | 198 lbs. |
| <i>HGP 360</i> 750 044 068 | Hot Vacuum Press Diaphragm Area: 44" x 68" (1,120 mm x 1,730 mm) | \$ 5,995.00 | 320 lbs. |
| <i>HGP 560</i> 750 052 102 | Hot Vacuum Press and Stand Diaphragm Area: 50.25" x 98.25" (1,276 mm x 2,495 mm) | \$ 9,995.00 | 1,000 lbs. |

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington *laminations* Incorporated

1040 Avenue M ~ Grand Prairie, Texas 75050 U.S.A.

Tel: 972.336.0012 Fax: 972.352.2975

ACCESSORIES

| Model & Part # | Description of Product | Commercial Price | Ship Wt. |
|--|--|-----------------------------|---------------------|
| <i>STA 220</i> 755 000 220 | Stand for HGP 220 Hot Vacuum Press | \$ 433.95 | 31 lbs. |
| <i>STA 260</i> 755 000 260 | Stand for HGP 260 Hot Vacuum Press | \$ 481.95 | 38 lbs. |
| <i>STA 360</i> 755 000 360 | Stand for HGP 360 Hot Vacuum Press | \$ 587.95 | 46 lbs. |
| <i>StarCart 12</i> 800 012 000 | Mobile 12 roll capacity material storage cart capable of storing full size rolls of laminate, mounting adhesive or related products. Complete mobility for heavy and sometimes hard-to-handle materials. | \$ 435.00 | 60 lbs. |
| <i>StarTrim 62</i> 900 062 000 | Quality engineered rotary trimmer with a 62" (157.48 cm) cutting width. Solid films up to 10 mil thick can be trimmed with ease and accuracy. Complete with stand and waste catcher. | \$ 1,550.00 | 95 lbs. |
| <i>Star62 Plot Spool</i> 900 062 001 | Front holder for original plot rolls for roll-to-roll application or for simple handling convenience. | **Special Order Item** | |
| <i>Star44 Plot Spool</i> 900 044 001 | Front holder for original plot rolls for roll-to-roll application or for simple handling convenience. | **Special Order Item** | |
| <i>Star44 Take-Up</i> 900 044 002 | Rear take-up roller for completion of the roll-to-roll application. | **Special Order Item** | |

Commercial Price List in U.S. Dollars

Effective September 2004

All products and brand names are marks of their respective holders.

To Order ~ Toll Free Fax: 888. 563. 6565 or Toll Free Tel: 877. 317. 1716

www.remingtonlaminations.com

Remington laminations Incorporated

Worldwide suppliers of Laminates - Adhesives- Ink Jet materials - Equipment
Tel: 972.336.0012 ~ Tel: 877. 317. 1716 (Toll Free) Fax: 972.352.2975 ~ Fax: 888. 563. 6565 (Toll Free)

Application for Credit

COMPANY INFORMATION:

Name of company or individual

Years at this address:

Street address

City

State/Province

Zip/Code

Tel #

Fax #

HEREBY applies for credit in accordance with the terms and conditions of:

Remington laminations Incorporated

1040 Avenue M
Grand Prairie, TX 75050

Attn: Credit Department

Terms: Net 30 days with approved credit

The following information provided will be held in the strictest confidence;

Corporation: ____ Partnership: ____ Individual: ____ Other: ____

Name(s) of Principal(s)

Title(s)

1. _____

2. _____

OWNERSHIP

CREDIT CARD # _____ Exp Date: _____

Name on Card _____ Signature: _____

BANKING

Bank

Account Numbers and Account Type

Bank officer or department

Tel #

Fax #

Business name

Tel #

Fax #

Contact/Account #

CREDIT 1. _____

REFERENCES

2. _____

We certify that all the information on this form is correct. We fully understand your credit terms and agree to the proper payment in consideration of extended credit. If for any reason at all invoice is not paid within terms by signing below I authorize Remington Laminations Inc. to charge the total to card listed above. Also by signing, I authorize the release of credit information to Remington laminations Incorporated.

Date: _____ 2004 Signed: _____ Title: _____

Thank you, we look forward to serving you ~

REMINGTON HAS IT ALL!


Simplicity in Mounting and Laminating with Professional Results!



Star 44
Mounter / Laminator



Star 62
Mounter / Laminator

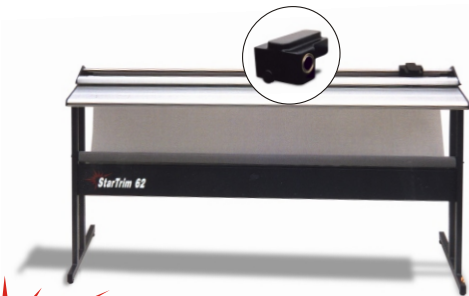

Star Trim 62



Star Cart 12



Hot Glass Press

Specializing in thermal and pressure sensitive laminating films and mounting adhesives as well as supplies for heat presses.



Remington *laminations* Incorporated

1040 Avenue M • Grand Prairie, Texas 75050 USA
Tel: 877.317.1716 (Toll Free USA) or 972.336.0012 (Int'l)
Fax: 888.563.6565 (Toll Free USA) or 972.352.2975 (Int'l)

RemingtonLaminations.com

Product Features

Star 44

Twin Silicone Rollers
 Ability to use hot or cold
 Brake Control
 Film Liner Take-Up
 Self-Grip Wing Style Material Shafts
 Foot Pedal Operation
 Emergency Stop Buttons
 Single or Dual Heated Units Avail.

Roller Opening: 5/8" (1.58cm)
 Roller Speed: 10 fpm (3.3 mpm)
 Roller Temp: 275F (135c)
 Material Roll Dia: 8" (20.3cm)

Supply Core: 3.0" (7.6cm)
 Moveability: 4 double casters
 Permanent: 4 sciew-down feet

220 volts 50/60 Hz
 Single Phase 13 amp (shr)
 Single Phase 24 amp (dhr)
 63"w x 24.5"d x 50.5"h
 (160cm x 62.2cm x 128.2cm)
 Max Width: 44" (111.7cm)

Star 62

Twin Silicone Rollers
 Ability to use hot or cold
 Wave Control
 Brake Control
 Film Liner Take-Up
 Self-Grip Wing Style Material Shafts
 Foot Pedal Operation
 Electronic Safety Device
 Emergency Stop Buttons
 Single or Dual Heated Units Avail.

Roller Opening: 1.5" (3.8cm)
 Roller Speed: 15 fpm (4.5 mpm)
 Roller Temp: 275F (135c)
 Material Roll Dia: 8" (20.3cm)

Supply Core: 3.0" (7.6cm)
 Moveability: 4 double casters
 Permanent: 4 sciew-down feet

220 volts 50/60 Hz
 Single Phase 11 amp (shr)
 Single Phase 23 amp (dhr)
 81"w x 24.5"d x 50.5"h
 (205.7cm x 62.2cm x 128.2cm)
 Max Width: 62" (157.4cm)

Star Trim 62

62" Material Trimmer
 Cast Aluminum Head
 Self Sharpening Rotary Wheel
 Swing-Up Head with Release Knob
 Steel End Frames for Strength
 Anodized Aluminum Feed Board
 Alignment Grooves
 Self-Clamping Transparent Strip
 Linear Ball Bearings
 Steel Stand with Waste Catch Bag

Dimensions: 71"w x 17"d x 38"h

Weight: 106 lbs

Accessories: 48" Extension Table
 and Roll Stock Holder

Star Cart 12

Three Models Available!
 12 Vertical 3" core supports
 12 Vertical 2" core supports
 12 Combination of 2" & 3" supports

Holds 8" Diameter Full Size Rolls
 Four Swivel Casters (Two Locking)
 Speedy Consolidated Inventory Check
 All Steel Construction

Dimensions: 38"w x 34"d x 16"h
 Weight: 45 lbs

Hot Glass Press

Glass Top for Application Visibility
 Fast & Even Heating System
 Programmable Vacuum Cycle
 Sizes to Suit Most Applications
 Swift & Accurate Temp. Adjustment
 Manual Override
 Digitally Controlled Timer
 Fully Controlled Pressure Settings

Sizes: From 29" x 41" to 56" x 103"

Time to Vacuum: 20 - 30 seconds

Time to Temp: 12 - 15 minutes

Power: 2.3 - 5.75 kW

Consumption: 10 - 25 Amps